

# Appendix F.6

## 2019/20 Price List Information

### Amended proposed access arrangement

28 February 2019

**An appropriate citation for this paper is:**

Appendix F.6

**Western Power**

363 Wellington Street

Perth WA 6000

GPO Box L921 Perth WA 6842

T: 13 10 87 | Fax: 08 9225 2660

TTY 1800 13 13 51 | TIS 13 14 50

Electricity Networks Corporation

ABN 18 540 492 861

[enquiry@westernpower.com.au](mailto:enquiry@westernpower.com.au)

[westernpower.com.au](http://westernpower.com.au)

Enquiries about this report should be directed to:

**AA4 Project Team**

Email: [AA4@westernpower.com.au](mailto:AA4@westernpower.com.au)

# Contents

<b>1.</b>	<b>Introduction .....</b>	<b>1</b>
1.1	Code Requirements .....	1
1.2	2019/20 Foreword .....	1
1.3	Revenue targets for 2019/20 .....	2
1.4	Forecast revenue recovery .....	4
<b>2.</b>	<b>Pricing Principles Overview .....</b>	<b>6</b>
2.1	Pricing Objectives .....	6
2.2	Pricing Methods .....	7
<b>3.</b>	<b>Derivation of Transmission System Cost of Supply .....</b>	<b>9</b>
3.1	Cost Pools .....	9
3.2	Cost of Supply .....	10
3.3	Methodology of Allocating to Cost Pools .....	12
3.4	Cost Pool Allocations .....	13
<b>4.</b>	<b>Derivation of Distribution System Cost of Supply .....</b>	<b>14</b>
4.1	Cost Pools .....	14
4.2	Customer Groups .....	14
4.3	Locational Zones .....	14
4.4	Methodology of Deriving the Cost of Supply .....	16
4.5	Cost Pool Allocations .....	21
<b>5.</b>	<b>Reference Tariff Structure .....</b>	<b>24</b>
5.1	Reference Services and Tariff Structure .....	24
5.2	Exit Service Tariff Overview .....	25
5.3	Entry Service Tariff Overview .....	28
5.4	Bi-directional Service Tariff Overview .....	28
5.5	Other Tariffs Overview .....	31
<b>6.</b>	<b>Derivation of Transmission System Tariff Components .....</b>	<b>32</b>
6.1	Cost Reflective Network Pricing .....	32
6.2	Price Setting for Transmission Reference Services .....	33
6.3	Price Setting for Distribution Reference Services .....	35
6.4	Annual Price Review .....	41
6.5	Compliance with sections 7.3 (b) and 7.6 of the <i>Code</i> .....	42

<b>7.</b>	<b>Derivation of Distribution System Tariff Components .....</b>	<b>44</b>
7.1	Price Setting .....	44
7.2	Demonstration of Derivation of Distribution Components of Distribution Reference Tariffs .....	53
7.3	Demonstration that Distribution Reference Tariffs are between incremental and stand-alone cost of service provision .....	58
7.4	Demonstration that incremental costs are recovered through variable components.....	59
7.5	Annual Price Review.....	60
7.6	TEC in the Distribution Components of Distribution Reference Tariffs.....	60
<b>8.</b>	<b>Derivation of Other Tariff Components .....</b>	<b>65</b>
8.1	RT25, RT28 and RT29 .....	65
8.2	RT26 and RT27 .....	65
<b>9.</b>	<b>Price Changes .....</b>	<b>66</b>
9.1	Side Constraint Demonstration.....	66
9.2	Individual component changes .....	68
<b>Appendix A</b>	<b>.....</b>	<b>A-1</b>

# 1. Introduction

This document is Western Power’s Price List Information, as defined in the *Electricity Networks Access Code 2004* (Code), to apply from 1 July 2019 or as approved by the Economic Regulation Authority (the *Authority*).

This document details:

- the history of the network tariffs
- the Price List’s compliance with the *access arrangement*
- the objectives and principles that underlie Western Power’s approach to deriving the reference tariffs
- the methodology of deriving cost of supply and the reference tariffs from the target revenue.

## 1.1 Code Requirements

Section 8.1 of the *Code* requires Western Power to submit *Price List Information* to the *Authority*.

The *Code* defines *Price List Information* as:

“price list information” means a document which sets out information which would reasonably be required to enable the *Authority*, users and applicants to:

- a. Understand how the service provider derived the elements of the proposed price list; and
- b. Assess the compliance of the proposed price list with the *access arrangement*.

The *access arrangement* contains the detailed price control formula that is applied each year to determine the network tariffs. Network tariffs are set each year to recover the revenue target. For 2019/20 the revenue target is the sum of:

- Western Power’s revenue requirement contained in the *access arrangement* plus
- an adjustment for the Tariff Equalisation Contribution (TEC) plus
- an adjustment for any previous year revenue over or under-recoveries due to the TEC

## 1.2 2019/20 Foreword

This section details a number of matters that relate specifically to the preparation of the 2019/20 Price List.

### 1.2.1 Price List forms part of proposal

The 2019/20 Price List forms part of Western Power’s amend proposal for the fourth *access arrangement* period (AA4). Due to delays with the AA4 process, there was no 2017/18 and 2018/19 Price List produced in April 2017 and April 2018 respectively, with the 2016/17 Price List remaining in place throughout. The *access arrangement* includes a 2017/18 Price List (attached at Appendix F.1) and a 2018/19 Price List (attached at Appendix F.3) however these both use the prices in the 2016/17 Price List.

### 1.2.2 Metering pricing

For 19/20, the prices for metering have been set for each reference tariff to recover the cost of the standard metering service for the relevant reference tariff. Users who choose a different reference

metering service will be required to pay an additional fee, reflecting Western Power's incremental cost of providing the service.

Revenue for standard metering services is recovered within the distribution revenue target.

### **1.2.3 Streetlight pricing and services**

Western Power is adopting a new replacement strategy for the AA4 period. Western Power is currently evaluating its luminaire replacement strategy. Our preferred position is light emitting diode (LED) streetlight replacements as the default for all failed luminaires. In the event of a lamp failure, Western Power will continue to replace the lamp with a traditional lamp equivalent. Western Power will also offer customers LED equivalent option for all current streetlight types for State Underground Power Program (SUPP) and new subdivision applications.

Pricing recognises that there is likely to be a benefit of reduced ongoing operating expenditure over the life of an LED luminaire compared to a traditional luminaire.

Western Power's LED streetlight asset tariffs for 19/20 are based on a capital annuity payment to recover the cost of the luminaire and an allocation of forecast operating costs.

Streetlight revenue is recovered within the distribution revenue target and is detailed in section 4.5.1.

### **1.2.4 Changes to the Excess Network Usage Charge**

As discussed in attachment 11.1 of the initial AA4 proposal, Western Power is proposing changes to the way that use of the network in excess of contracted values is charged. Excess Network Usage Charges (ENUC) apply when a customer exceeds their contracted maximum demand (for a load) or their declared sent out capacity (for a generator). The ENUC is there to incentivise customers to operate within the contracted values as these are the values used when planning and operating the network.

However, Western Power recognises that not all instances of exceedance have equal impact. That is, there are some parts of the network where a demand increase would not have an impact on the safety or reliability of the network. The way the ENUC has been applied over the AA3 period does not make that distinction. To address this concern, Western Power is proposing to introduce a more nuanced ENUC. The new charges will consider the location of the customer, making the signal clearer and fairer. Each year, Western Power produces a State of the Infrastructure Report, this document includes discussion on which parts of the transmission network that are constrained. It is these areas that the revised ENUC will focus on.

Section 7.1.14 discusses this in further detail.

## **1.3 Revenue targets for 2019/20**

The following sections detail the calculation of the revenue requirements for Western Power's Transmission and Distribution networks.

### **1.3.1 Target Transmission Regulated Revenue**

The following table demonstrates the derivation of the target transmission regulated revenue for 2019/20 in accordance with section 5.8 of the *access arrangement*.

**Table 1.1 – Target Transmission Regulated Revenue for 2019/20 (\$M real as at 30 June 2017)**

Transmission Revenue	2019/20
TR <sub>t</sub>	340.0
TAA3 <sub>t</sub>	0.0
TTR <sub>t</sub>	340.0

The derivation of the transmission system cost of supply cost pools and tariffs require the reference service revenue as an input in nominal terms. The following table details the transmission reference service revenue in nominal terms (please see section 1.3.3 for details of the inflation factor used).

**Table 1.2 - Transmission Target Revenue for 2019/20 (\$M)**

Transmission Revenue	Revenue (Real)	Revenue (Nominal)
Target Revenue (TTR <sub>2019/20</sub> )	340.0	358.2

### 1.3.2 Target Distribution Regulated Revenue

The following table demonstrates the derivation of the target distribution regulated revenue for 2019/20 in accordance with section 5.11 of the *access arrangement*.

**Table 1.3 – Target Distribution Regulated Revenue for 2019/20 (\$M real as at 30 June 2017)**

Distribution Revenue	2019/20
DR <sub>t</sub>	974.7
DAA3 <sub>t</sub>	0
TDR <sub>t</sub> (not including TEC <sub>t</sub> )	974.7

The derivation of the distribution system cost of supply cost pools and tariffs require the reference service revenue as an input in nominal terms. The following table details the distribution reference service revenue in nominal terms (please see section 1.3.3 for details of the inflation factor used).

**Table 1.4 - Distribution Revenue Target Revenue for 2019/20 (\$M)**

Distribution Revenue	Revenue (Real)	Revenue (Nominal)
TDR <sub>t</sub> (not including TEC <sub>t</sub> )	974.7	1,027.0
TEC <sub>t</sub>		162.0
Target Revenue (TDR <sub>2019/20</sub> )		1,189.0

### 1.3.3 Derivation of Inflation Factor

In sections 1.3.1 and 1.3.2 Western Power has inflated the reference service revenue from real terms to nominal terms by using inflation in accordance with sections 5.6 and 5.7 of the *access arrangement*.

**Table 1.5 - Derivation of 2019/20 Inflation Factor**

December 2015 – December 2016 – Actual	1.48%
December 2016 – December 2017 – Actual	1.91%
September 2017 – September 2018 – Actual	1.89%
Derived Inflation Factor	1.054

### 1.4 Forecast revenue recovery

The following table sets out the reference service revenue, by tariff, which is forecast to be collected when applying the 2019/20 Price List. Note the new reference tariffs are showing zero volumes as there will not be any customers on these reference services at 1 July 2019.

**Table 1.6 – Reference Service Revenue Forecast in 2019/20 (\$M Nominal)**

Reference Tariff	kWh	Customer Numbers	Forecast Transmission Revenue	Forecast Distribution Revenue
TRT1 – Transmission Exit	N/A	31	35.1	0.0
TRT2 – Transmission Entry	N/A	31	47.0	0.0
RT1 - Anytime Energy (Residential)	4,035,000,000	803,312	82.3	536.9
RT2 - Anytime Energy (Business)	930,000,000	72,319	22.8	128.5
RT3 - Time of Use Energy (Residential)	53,000,000	7,465	1.0	5.7
RT4 - Time of Use Energy (Business)	829,000,000	9,421	19.7	73.3
RT5 - High Voltage Metered Demand	758,000,000	296	9.1	22.9
RT6 - Low Voltage Metered Demand	2,037,000,000	3,967	38.0	117.3
RT7 - High Voltage Contract Maximum Demand	3,109,000,000	291	61.9	60.2
RT8 - Low Voltage Contract Maximum Demand	186,000,000	58	5.1	12.7
RT9 – Streetlighting	141,000,000	288,415	1.8	40.2
RT10 - Unmetered Supplies	40,000,000	16,493	0.3	4.8
RT11 - Distribution Entry	-	-	1.3	2.2
RT13 – Anytime Energy (Residential) Bi-directional	1,051,000,000	244,678	21.4	152.1
RT14 – Anytime Energy (Business) Bi-directional	123,000,000	1,363	3.0	11.8



Reference Tariff	kWh	Customer Numbers	Forecast Transmission Revenue	Forecast Distribution Revenue
RT15 – Time of Use (Residential) Bi-directional	52,000,000	10,159	1.0	6.4
RT16 – Time of Use (Business) Bi-directional	161,000,000	887	3.9	13.3
RT17 – 3 Part Time of Use Energy (Residential)	-	-	-	-
RT18 - 3 Part Time of Use Energy (Business)	-	-	-	-
RT19 – Time of Use Demand (Residential)	-	-	-	-
RT20 – Time of Use Demand (Business)	-	-	-	-
RT21 – Multi Part Time of Use (Residential)	-	-	-	-
RT22 – Multi Part Time of Use (Business)	-	-	-	-
<b>Total Reference Service Revenue</b>	<b>13,505,000,000</b>	<b>1,459,194</b>	<b>354.8</b>	<b>1,188.3</b>
Standby Services	-	-	3.4	0.7
<b>TOTAL REVENUE TARGET REVENUE</b>			<b>358.2</b>	<b>1,189.0</b>

## 2. Pricing Principles Overview

This section discusses the principles, objectives and an overview of the methodology used in determining the reference tariffs.

### 2.1 Pricing Objectives

Reference service revenue is recovered through a set of reference tariffs that have been designed to meet high-level objectives described below. These objectives have been updated for the AA4 period.

**Table 2.1: Pricing Objectives**

Theme	Pricing objectives
Revenue sufficiency	<p>Tariffs should be formulated to recover revenue from users in a manner that achieves:</p> <ul style="list-style-type: none"><li>• sufficient revenue to provide a safe and reliable network</li><li>• efficient network services to all network users</li><li>• sufficient revenue to recover the revenue allowance defined in the price control.</li></ul>
Network efficiency	<p>Tariffs must send appropriate and effective signals to promote the economically efficient investment in, operation and use of the Western Power Network.</p> <p>Tariff signals will include the objective of:</p> <ul style="list-style-type: none"><li>• informing network users of their impact on existing and future network capacity and costs</li><li>• assisting in managing growth in peak demand (to avoid increases in capital expenditure requirements)</li><li>• providing network users with an incentive to shift their loads away from peak to off-peak periods.</li></ul> <p>Tariffs will be cost reflective by:</p> <ul style="list-style-type: none"><li>• reflecting the actual long run, time-varying cost of service provision to network users</li><li>• individual charging parameters within each tariff taking account of the long run marginal costs.</li></ul>
Choice	<p>Tariffs should provide network users with tariff choices that enable them to manage their costs</p>
Simplicity	<p>Be simple and straightforward, readily understood by customers and minimise administration costs, as far as is reasonable taking into account other objectives</p>

## 2.2 Pricing Methods

The pricing methods (cost allocations) are set out in section 6.5 of the *access arrangement*. This section provides a summary of Western Power's pricing methods.

### 2.2.1 General

Reference tariffs aim to reasonably reflect the cost of providing the network service to users. The first step in developing reference tariffs is to model the cost of supply for users. The cost of supply cannot be derived at an individual customer level and so customers are categorised into a number of groups with similar costs.

Reference tariffs will generally have a number of components, which fall into fixed and variable categories. Fixed components would generally be a charge per user regardless of their size whereas the variable component would be related to energy or demand. These categories of costs reflect the fact that costs will be related either to the number of users serviced or to the amount of capacity provided.

The two processes of 'determining cost of supply' and 'setting reference tariffs' to recover those costs are separated so the costs of supply can be allocated to particular customer groups and the reference tariffs can be set to recover those costs. The costs are separated into fixed and variable components and the reference tariffs are similarly split so that fixed costs are recovered by fixed charges and variable costs by variable charges.

It is recognised the determination of the cost of supply for users and respective reference tariffs is an inexact process. A number of simplifying assumptions are required, for example, to categorise users into a small number of customer groups or classes with similar characteristics.

It is also noted that demand is the best measurement of capacity. However, the vast majority of users have energy only metering (or no metering at all) that does not record demand, and therefore energy is used as a proxy for demand.

### 2.2.2 Process to Determine Cost of Supply

This section presents an overview of the process to derive the cost of supply. Detailed information on this process is provided in sections 3 and 4.

There are two basic stages in determining the cost of supply for users:

- determination of the reference service revenue for Western Power; and
- allocation of the revenue components to different cost pools for various customer groups, based on factors such as supply voltage, location and load characteristics.

Note: Transmission and distribution are treated separately, and each has independent target revenues.

The reference service revenue requirement must then be allocated to asset classes and the use of the assets allocated to users. The customer groups used in the analysis and modelling of costs generally reflect the nature of the physical connection to the network and the relative size and nature of the user, namely:

Transmission connected:

- Transmission Generation
- Transmission Loads

Distribution connected:

- High Voltage >1 MVA maximum demand
- High Voltage <1 MVA maximum demand
- Low Voltage >1 MVA maximum demand
- General Business Large (300 to < 1,000 kVA maximum demand)
- General Business Medium (100 to < 300 kVA maximum demand)
- General Business Small (15 to < 100 kVA maximum demand)
- Small Business (<15 kVA maximum demand)
- Residential
- Streetlights
- Unmetered Supplies

### **2.2.3 Process to Determine Reference Tariffs**

This section presents an overview of the process by which reference tariffs are derived. Detailed information on the process is provided in sections 5.5.1 and 7.

The users within the customer groups are linked to reference tariffs so that cost of supply can then be derived for each reference tariff. The cost of supply is in terms of fixed and variable costs and price settings are then simply established to recover the cost pools from the users.

### **2.2.4 Modelling Cost Allocations**

Western Power's transmission and distribution cost of supply (COS) models accurately reflect the network cost of supply for the various customer groups. The model assembles capital and operating costs for the components (lines, substations, transformers, etc.) of the modern equivalent assets employed in providing network capacity and delivering energy and allocates these to each customer group according to a pre-determined set of principles.

Tables from Western Power's COS model is provided in this document to demonstrate that Western Power complies with its cost allocation methodology.

### 3. Derivation of Transmission System Cost of Supply

This section details the derivation of the transmission system cost of supply for connection points on the transmission system.

#### 3.1 Cost Pools

The following cost pools are used in the derivation of the transmission system cost of supply:

- Connection Services Cost Pool. Which is further allocated to the following cost pools:
  - Connection Services for Exit Points Cost Pool; and
  - Connection Services for Entry Points Cost Pool.
- Shared Network Services Cost Pool. Which is further allocated to the following cost pools:
  - Use of System for Loads Cost Pool;
  - Use of System for Generators Cost Pool; and
  - Common Service for Loads Cost Pool.
- Control System Services Cost Pool. Which is further allocated to the following cost pools:
  - Control System Services for Loads Cost Pool; and
  - Control System Services for Generators Cost Pool.

##### 3.1.1 Connection Services for Exit Points Cost Pool

The Connection Services for Exit Points Cost Pool includes the Gross Optimised Deprival Value (GODV) of all connection assets at each Exit Point and one-third of the value of the voltage control assets at those points (since the function of voltage control equipment is partly location specific and partly system related).

##### 3.1.2 Connection Services for Entry Points Cost Pool

The Connection Services for Entry Points Cost Pool includes the GODV of all connection assets at each Entry Point and one-third of the value of the voltage control assets at those points (since the function of voltage control equipment is partly location specific and partly system related).

##### 3.1.3 Use of System for Loads Cost Pool

Use of System for Exit Points Cost Pool includes 50% of the total Shared Network Services Cost Pool.

##### 3.1.4 Use of System for Generators Cost Pool

Use of System for Entry Points Cost Pool includes 20% of the total Shared Network Services Cost Pool.

##### 3.1.5 Common Service for Loads Cost Pool

The Common Service for Loads Cost Pool includes:

- 30% of the total Shared Network Services Cost Pool;
- Shared Voltage Control Assets – two thirds of the value of voltage control assets at Entry and Exit points (since the function of voltage control equipment is partly location specific and partly system related) and the value of all of voltage control assets at transmission substations; and

- Adjustments for under or over recovery of revenue expected for any reason in any other tariff component.

### **3.1.6 Control System Service for Loads Cost Pool**

The Control System Service for Loads Cost Pool consists of a portion of the total cost of all Supervisory Control and Data Acquisition (SCADA), SCADA related communications equipment, and costs associated with the control centre, proportioned based on the total number of points in the SCADA master station relevant to loads.

### **3.1.7 Control System Service for Generators Cost Pool**

The Control System Service for Generators Cost Pool consists of a portion of the total cost of all SCADA, SCADA related communications equipment, and costs associated with the control centre, proportioned based on the total number of points in the SCADA master station relevant to generators.

## **3.2 Cost of Supply**

In order to calculate transmission cost of supply, all transmission assets are valued and categorised into the above cost pools. Each network branch is further defined as either exit, entry or shared network and cost allocation is then applied based on the GODV of all relevant assets.

### **3.2.1 Transmission Assets**


The principal elements of the transmission networks include transmission substations and zone substations, interconnected by transmission and sub-transmission lines. The transmission networks enable the transportation of electricity from power stations to zone substations and high voltage user loads. The zone substations provide the interface between the transmission network and distribution network.

Generally, the transmission networks assets comprise connection assets, shared network assets and other or ancillary assets. These are described as follows:

- Connection Assets: those assets at the point of physical interconnection with the transmission networks which are dedicated to a User - that is, at substations including transformers and switchgear, but excluding the incoming line switchgear. Connection assets for generators are referred to as entry assets and for loads they are called exit assets.
- Shared Network Assets: all other transmission assets, which are shared to some extent by network Users.
- Other or Ancillary Assets: network assets performing an Ancillary Services function comprise:
  - those providing a Control System Service, for example, system control centres, supervisory control and communications facilities.
  - those providing a Voltage Control Service in the networks, for example, a proportion of the costs of capacitor and reactor banks in substations.

Figure 1 shows, in simplified form, the principal elements of the transmission networks and the categorisation of the assets as described above.

Figure 1: Transmission Network Assets

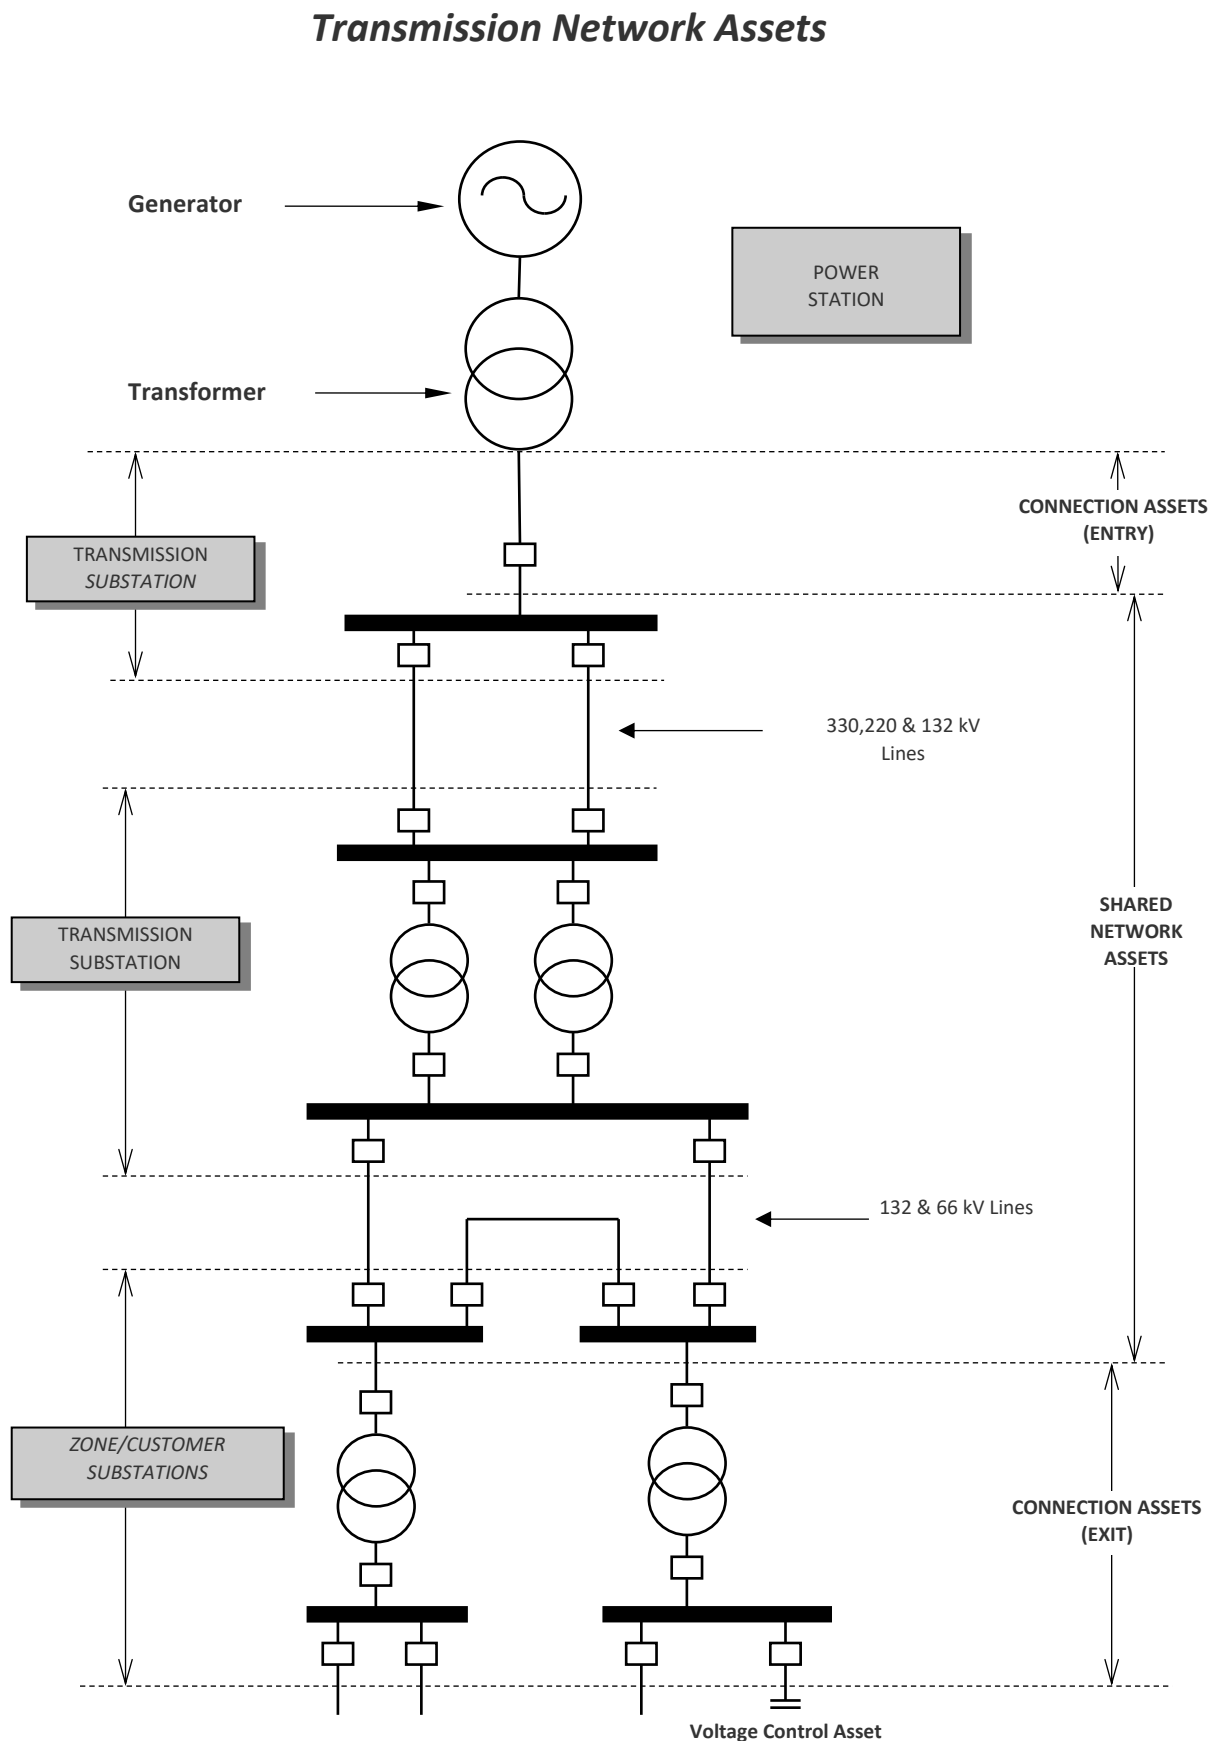

### 3.2.2 Asset Valuation

All valuations of transmission assets are performed using the Optimised Deprival Value (ODV) methodology.

### 3.2.3 Valuation of Individual Branches and Nodes

To determine cost of supply, valuation data is required for every individual branch and node on the network. Every branch and node consist of many individual asset valuation building blocks that are all individually assessed.

Branches include transmission lines and transformers and include the substation circuits at each end. Each transmission line branch will typically have the cost of each of the circuit breakers at different substations included, whereas each transformer branch will typically have the cost of each of the circuit breakers at that same substation included.

Substation site establishment costs are allocated equally to all substation circuits.

The costs for shared circuit breakers (such as bus section breakers etc.) are allocated equally between all other substation circuits, which derive benefit from that shared circuit breaker.

## 3.3 Methodology of Allocating to Cost Pools

### 3.3.1 Overview

The methodology for allocating the transmission revenue to each cost pool is to allocate the revenue in the proportion to the GODV of the assets in each cost pool.

However, the annual revenue requirement for the Control System Service Cost Pool is calculated separately (using the same method as for all other network assets) but assuming higher depreciation and operating expenditure than for other network assets. When calculating other Cost Pool Revenues appropriate adjustments are required.

Consequently:

$$\text{Cost Pool Revenue} = \text{RR} * \text{GODV (Cost Pool)}$$

where:

$$\text{RR} = \text{a revenue rate of return determined as } \text{AARR}_{\text{network}} / \Sigma \text{GODV}_{\text{network}}$$

$$\text{AARR}_{\text{network}} = \text{Transmission Reference Service Revenue excluding Annual Revenue Requirement for Control System Services.}$$

$$\text{GODV (Cost Pool)} = \text{GODV of the transmission network assets which belong in that cost pool.}$$

$$\Sigma \text{GODV}_{\text{network}} = \text{GODV of all transmission assets excluding Control System Service assets}$$



### 3.4 Cost Pool Allocations

Applying the above methodology, the following cost pool revenues were derived for 2019/20.

**Table 3.1 - Transmission Pricing Cost Pools for 2019/20 (\$M Nominal)**

Cost Pool	Allocated Revenue
Entry Connection	7.2
Exit Connection HV	0.6
Exit Connection LV	70.5
Control System Services for Generators	5.8
Control System Services for Loads	26.4
Use of System for Generators	42.6
Use of System for Loads	115.4
Common Service for Loads (including Voltage Control)	89.4
Metering CT/VT	0.5
Total Revenue Target Revenue	358.2

## 4. Derivation of Distribution System Cost of Supply

This section details the derivation of the distribution system cost of supply for connection points on the distribution system.

The derivation of the distribution system cost of supply operates along the same principles as the transmission system. That is, the reference service revenue entitlement (which includes TEC) is determined for the distribution system, and that revenue is then allocated to asset categories to derive the cost of supply for each of the customer groups. The cost of supply is based on the relative usage of each asset category by the various customer groups.

The structure of the distribution network cost of supply and reference tariffs reflects the features of the distribution network.

### 4.1 Cost Pools

The distribution cost pools used in the distribution system cost of supply are:

- High Voltage Network
- Low Voltage Network
- Transformers
- Streetlight Assets
- Metering
- Administration

### 4.2 Customer Groups

The distribution customer groups used in the distribution system cost of supply are:

- High Voltage >1 MVA maximum demand
- High Voltage <1 MVA maximum demand
- Low Voltage >1 MVA maximum demand
- General Business Large (300 to < 1,000 kVA maximum demand)
- General Business Medium (100 to < 300 kVA maximum demand)
- General Business Small (15 to < 100 kVA maximum demand)
- Small Business (<15 kVA maximum demand)
- Residential
- Streetlights
- Unmetered Supplies

### 4.3 Locational Zones

Distribution reference tariffs are provided for individual locational zones for users with energy demands in excess of 1 MVA. Locational zones are defined as those areas supplied by the network where the distribution system cost of supply is similar. For example, the rural wheat belt areas of Western Australia

are considered to have a reasonably uniform distribution system and costs of supply, as do the urban and CBD areas of Perth.

Zone substations with similar cost structures are allocated to locational zones that feed an area of the distribution system. Where a zone substation supplies an area of more than one distinct cost of supply, then all users supplied from that substation are considered to be in the one dominant category. That is, there is only one locational zone defined for each zone substation.

The five zones are defined in the sections below, and for details of the allocation of each zone substation to locational zones see the price list in the *access arrangement*.

#### **4.3.1 CBD Locational Zone**

This is defined as the intense business area generally recognised as the Perth CBD area. The defining street boundaries is generally from the Swan River north to Aberdeen Street Northbridge, west to Rokeby Road Subiaco, and east to the East Perth redevelopment area.

#### **4.3.2 Urban Locational Zone**

This is defined as the uniformly and continuously settled areas of Perth that contains the urban domestic, commercial and industrial users but exclude the CBD zone. This area also excludes the outer urban area that is treated as mixed. The country towns of Geraldton and Kalgoorlie are also included.

#### **4.3.3 Rural Locational Zone**

This is defined to include those areas which have a predominantly rural/farming characteristic and includes small to medium size towns within the southwest land division, for example Merredin.

#### **4.3.4 Mixed Locational Zone**

This is defined to include those areas that have a mixed user base that has at least two dominant load types, for example a mix of significant mining and rural loads or significant urban and rural loads. It also includes significant outer areas of Perth, which can be a mix of fringe urban, semi-rural and rural types, for example Yanchep.

#### **4.3.5 Mining Locational Zone**


This is defined to include the mining area surrounding Kalgoorlie, which is supplied at 33 kV and the mining area at Forrestania which is also supplied at 33 kV. It does not include the town of Kalgoorlie (Urban zone).

## 4.4 Methodology of Deriving the Cost of Supply

### 4.4.1 Flowchart

The derivation of the cost of supply for each customer group is illustrated in the following flow diagram.

**Figure 2: Distribution Cost of Supply Flow Chart**

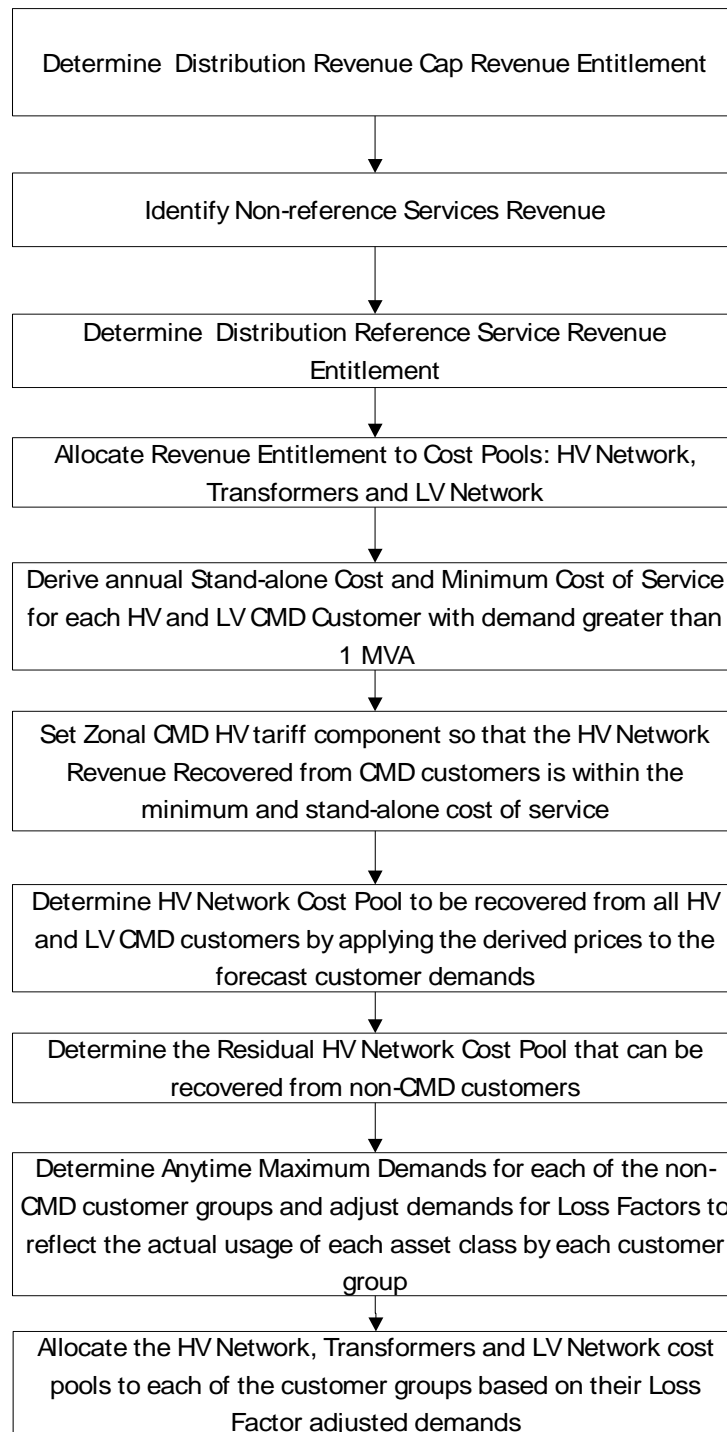

Each step in this process to derive the distribution cost of supply is described in more detail in the following sections.

#### **4.4.2 Calculate the Forecast Distribution Network Revenue to be recovered from Distribution-Connected Users**

The forecast distribution network revenue entitlement, determined in accordance with the approach approved by the *Authority* in the *access arrangement*, includes an amount for the TEC. The allocation of TEC to the cost pools and the customer groups is undertaken on the same basis as the network revenue entitlement set out below.

#### **4.4.3 Allocate Revenue Entitlement to Cost Pools HV Network, Transformers and LV Network**

The network revenue entitlement is then allocated to each of the asset classes being the High Voltage (HV) network, transformers and the Low Voltage (LV) network. The allocation is based on the GODV of each asset category as a proportion of the total GODV.

#### **4.4.4 Derive HV annual stand-alone cost and incremental cost of supply for all HV and LV CMD users with demand greater than 1 MVA**

In the cost of supply analysis, the costs for users with annual maximum demands less than 1,000 kVA are assumed to be uniform across the network whereas costs for users with demands above 1,000 kVA are determined on the basis of their location on the network and relative use of network assets.

On this basis, the HV network costs that can be allocated to users with maximum demands in excess of 1,000 kVA are calculated through a process that ensures the cost is between the incremental and stand-alone cost of supply. This approach is consistent with the requirements of section 7.3 of the *Code* and demonstrated in section 7.3.

In terms of costs of supply analysis, this approach is contrary to the approach for users with demands below 1,000 kVA. For these users the approach is facilitated by allocating the network costs on the basis of sharing the average costs of the network between users depending on their relative usage of the network components.

This approach for larger users can distort the final price outcomes because it assumes that costs can be allocated linearly on usage. This approach is reasonable for smaller users where the stand-alone cost will far exceed the average cost of supply. On the other hand, the stand-alone cost for larger users can be less than a simple linear allocation of costs and for this reason it is essential to take a different approach.

The approach taken is to derive the HV network incremental and stand-alone cost for each user with maximum demand in excess of 1,000 kVA. This process will give maximum and minimum revenues that could be recovered from this customer group.

The reality of network pricing is that the actual revenue recovered from these users should fall between these two values. The actual value is determined by deriving reference tariff components that, when applied to the forecast user data will produce charge and revenue outcomes that recover at least the incremental cost of supply but do not recover more than the stand-alone cost of supply. The detail of this price setting is contained in section 7.

#### **4.4.5 Redefine Revenue Pools**

The outcome of the process to date is that the HV network revenue for HV and LV users with maximum demands greater than 1,000 kVA has been forecast. This now results in a reallocation of the reference tariff revenue entitlement into the costs pools of:

- HV network cost pool that is recovered from users with demands greater than 1,000 kVA
- Residual HV network cost pool for users with demands less than 1,000 kVA

- Transformer cost pool
- LV network cost pool

These cost pools must now be allocated to customer groups based on relative usage of the network elements.

#### 4.4.6 Allocation of Residual HV Network Costs to Customer Groups

This allocation is to reflect the usage of each of the customer groups of the HV network remembering that the costs associated with users with maximum demands greater than 1,000 kVA have already been determined.

The allocation is based on the diversified maximum demand imposed by each customer group. Where a user has a metered demand, that demand is recorded but for the vast majority of users there is no metered demand. For all of these users a notional demand is calculated based on their diversified load factor. Those calculated demands are adjusted by average loss factors to reflect the actual demand placed on the HV network.

The load factors are based on industry codes that reflect typical users. These load factors were derived from sample data taken over a large number of users and are recorded against each user. The sum of the demands is called the anytime maximum demand (ATMD).

The load factors that are used are listed by customer group as follows:

**Table 4.1: Load Factor by Customer Group**

Customer Group	Load Factor (%)
Unmetered	8
Streetlights	8
Residential	8
Small Business	8
General Business Small	8
General Business Medium	5
General Business Large	4
Low Voltage >1MVA	4
High Voltage	1

#### 4.4.7 Fixed and Variable Costs

Based on the premise that the network was built in part to supply each user, it is reasonable to allocate some of the HV costs on a per user basis rather than purely on demand. Capacity to carry load should clearly be allocated on demand, but the cost to get a minimum capacity supply to a user should, in principle, simply be allocated on a per user basis. This reflects the principle that all users benefit from the HV line regardless of their actual usage.

The question of what percentage of costs should be allocated on a per user basis is the classical fixed and variable cost allocation issue. To determine the fixed component of the cost the approach taken will be to calculate the cost to establish the network to supply the smallest possible load to each user. The variable component of the cost can then be based on all costs that give the network capacity to provide differential supply to each user. This process is described below.

#### 4.4.7.1 Capital related costs (return and depreciation)

The “minimal” cost HV line could be seen as a single-phase line with minimum conductor size, maximum bay lengths and minimum pole and hardware ratings. It is reasonable to assign 40 metre bays in the urban area and 250 metre bays in rural areas for this purpose. The approximate costs for such hypothetical constructions (derived from the results of the 2004 valuation study) would be as follows.

**Table 4.2: Capital Related Costs**

Line Construction	Cost per Kilometre (\$)
1 Phase Steel (40 m bays)	18,000
3 Phase Large Size (40 m bays)	50,000
1 Phase Steel (250 m bays)	8,500
3 Phase Large Size (120 m bays)	24,000

From these numbers it is reasonable to deduce that the cost to provide a minimal HV supply is approximately 35% of the cost to provide a full capacity supply in both the urban and rural cases. The remaining 65% is therefore considered related to load and should be allocated on demand.

#### 4.4.7.2 Operating and maintenance costs

A proportion of the costs associated with operations and maintenance do not vary with load, while other costs are determined to be load related.

A proportion of maintenance costs relating to routine inspection and repair could be regarded as being fixed in nature, whereas a proportion is required to maintain capacity, and therefore could be regarded as variable. Fault restoration work can be similarly differentiated, depending on the nature of the faults.

It is difficult to be definitive in allocating maintenance costs but a 50:50 split between fixed and variable is considered reasonable and has been adopted for cost allocation purposes.

#### 4.4.7.3 Resultant cost allocation

Applying these percentage allocations to three phase HV capital and operational and maintenance costs results in a fixed to variable ratio of approximately 40:60.

#### 4.4.8 Allocation of Transformer Costs to Customer Groups

Transformers are installed to provide capacity and energy for each load and the costs can be fairly allocated on demand.

The cost of maintenance of transformers is a very small proportion of the total distribution network maintenance expense, and so no maintenance costs are allocated to transformers.

#### 4.4.9 Allocation of LV Network Costs to Customer Groups

The logic for developing cost allocation principles for LV network costs is identical to the HV case. Therefore, the LV costs are allocated on a similar basis.

However, the LV costs per kVA are generally higher for smaller users than for larger users. Larger users use proportionately less of the LV network because they are typically connected closer to transformers, and generally have a lower level of back-up. For example, a user with a load of 300 kVA or more would generally be connected directly to a transformer with limited capacity in the LV network to supply only part load in the event of an HV contingency.

Appropriate weighting factors have therefore been derived to reflect the proportionate usage of the LV network by the different customer groups, as follows:

Customer Group	Cost Weighting
Residential	1
Small Business	1
General Business - Small	1
General Business - Medium	0.9
General Business - Large	0.1
Low Voltage > 1 MVA	0.1
High Voltage	0

#### 4.4.10 Allocation of TEC Costs to Customer Groups

TEC is allocated to the cost pools consistent with the methodology detailed above. TEC is then allocated to customers groups on the same basis that is set out above for:

- allocation of HV network costs to customer groups
- allocation of transformer costs to customer groups
- allocation of LV network costs to customer groups

#### 4.4.11 Streetlighting Costs

Allocation of network costs to streetlighting is in two components - the use of network costs and the costs associated with the streetlight asset itself.

##### 4.4.11.1 Use of Network Costs

Costs for the use of the HV and LV networks and transformers are allocated on a fixed and variable basis as for other customer groups, but with customer numbers reduced by a factor of 10.

##### 4.4.11.2 Streetlight Asset Costs

Streetlighting costs are directly allocated to streetlights based on the share of the revenue target that is directly attributable to streetlight maintenance. This calculation is shown in section 4.5.1.



#### 4.4.12 Metering Costs

Similarly to streetlights, metering costs are allocated based on their share of the revenue target, shown in section 4.5.1.

#### 4.4.13 Administration Costs

The allocation of administration costs is based on specific charges for the larger customer groups, with the residual cost pool allocated by ATMD over the other customer groups.

### 4.5 Cost Pool Allocations

Applying the above methodology, the following tables details the allocation of the distribution network revenue entitlement (which includes TEC) to the cost pools:

**Table 4.3: Allocation of the Distribution Network Revenue Entitlement to Cost Pools**

Customer group	ATMD MVA	GWh	Loss Adjusted ATMD's	Transformer Adjusted ATMD's	LV Adjusted ATMD's	Number of Customers	LV Adjusted Customer Numbers	High Voltage Network		Low Voltage Network		Transformers	Streetlight Assets	Metering	Administration
								Fixed \$/annum	Variable \$/annum	Fixed \$/annum	Variable \$/annum	Variable \$/annum	Fixed		
Unmetered	6	40	6	6	6	16,493	16,493	2.0	0.4	1.4	0.3	0.2	0.0	0.0	0.6
Streetlights	36	141	39	39	4	288,415	28,842	3.6	2.4	2.0	0.2	1.3	27.8	0.0	1.9
Residential	1,998	5,191	2,090	2,090	2,090	1,065,614	1,065,614	131.4	140.3	78.6	108.4	74.0	0.0	27.1	95.7
Small Business	340	763	356	356	356	71,564	71,564	13.3	26.1	5.9	18.3	13.2	0.0	3.9	14.2
General Business - Small	561	1,259	587	587	587	12,608	12,608	2.1	43.9	1.1	30.4	22.0	0.0	2.1	20.6
General Business - Medium	497	1,114	513	513	462	2,833	2,549	0.5	38.1	0.2	24.2	19.3	0.0	1.3	18.0
General Business - Large	474	1,062	490	490	49	938	94	0.1	33.2	0.0	2.5	17.5	0.0	0.6	17.1
LV greater than 1 MVA	171	383	174	174	17	122	12	3.7	14.5	0.0	0.9	6.6	0.0	0.1	2.2
HV less than 1 MVA	82	295	84	0	0	144	0	0.0	4.1	0.0	0.0	0.0	0.0	0.2	2.3
HV>1 MVA	1,097	3,257	1,157	0	0	393	0	21.1	37.5	0.0	0.0	0.0	0.0	0.6	5.9

Customer group	ATMD MVA	GWh	Loss Adjusted ATMD's	Transformer Adjusted ATMD's	LV Adjusted ATMD's	Number of Customers	LV Adjusted Customer Numbers	High Voltage Network		Low Voltage Network		Transformers	Streetlight Assets	Metering	Administration
								Fixed \$/annum	Variable \$/annum	Fixed \$/annum	Variable \$/annum	Variable \$/annum	Fixed		
<b>TOTAL</b>	5,262	13,505	5,497	4,256	3,572	1,459,124	1,197,776	177.9	340.3	89.2	185.2	154.0	27.8	36.0	178.6

**Table 4.4 - Distribution Cost Pools for 2019/20 (\$M Nominal)**

Cost Pool	Locational Zone					Total
	CBD	Urban	Goldfields Mining	Mixed	Rural	
High Voltage Network	12.1	184.9	4.4	121.1	125.5	448.0
High Voltage Network > 1 MVA	9.3	37.6	5.3	14.1	3.9	70.2
<b>High Voltage Network Total</b>	<b>21.4</b>	<b>222.5</b>	<b>9.7</b>	<b>135.2</b>	<b>129.4</b>	<b>518.2</b>
Low Voltage Network	12.0	192.7	1.6	49.5	18.6	274.4
Transformers	8.2	81.8	2.2	37.7	24.2	154.0
Streetlight Assets						27.8
Metering						36.0
Administration						178.6
Revenue requirement						1,189.0

#### 4.5.1 Derivation of streetlight and metering asset cost pools

The costs for streetlight and metering shown in Table 4.4 are calculated using a similar approach as the overall revenue modelling approach taken to determine the transmission and distribution revenue targets. That is, using a building block approach to revenue. The cost pool is the sum of the:

- Return on assets (that is, the product of the rate of return with the Regulated Asset Base (RAB) of the assets);
- Depreciation (based on the regulated value of the assets and the expected life of the assets); and
- Operating expenditure approved.

Added to these costs are a portion of Western Power's overall tax building block and a portion of the recovery of deferred revenue. For a more detailed explanation of the building blocks, see Chapter 10 of the AAI for the initial proposal.

**Table 4.5: Derivation of Streetlight and Metering Costs**

2019/20 cost of service	Streetlights	Metering
Opening RAB	92.2	155.5
Return on asset	3.4	6.6
Depreciation	7.8	11.3
Opex	14.3	15.1
Indirect cost allocation	2.3	3.0
Cost of service	27.8	36.0

## 5. Reference Tariff Structure

This section provides an overview of the reference tariffs that apply to the transmission and distribution system.

### 5.1 Reference Services and Tariff Structure

The following table details the relationship between the reference services, detailed in the *access arrangement*, and the reference tariffs.

**Table 5.1 - Reference Services**

Reference service	Reference tariff
A1 – Anytime Energy (Residential) Exit Service	RT1
A2 – Anytime Energy (Business) Exit Service	RT2
A3 – Time of Use Energy (Residential) Exit Service	RT3
A4 – Time of Use Energy (Business) Exit Service	RT4
A5 – High Voltage Metered Demand Exit Service C5 – High Voltage Metered Demand Bi-directional Service	RT5
A6 – Low Voltage Metered Demand Exit Service C6 – Low Voltage Metered Demand Bi-directional Service	RT6
A7 – High Voltage Contract Maximum Demand Exit Service C7 – High Voltage Contract Maximum Demand Bi-directional Service	RT7
A8 – Low Voltage Contract Maximum Demand Exit Service C8 – Low Voltage Contract Maximum Demand Bi-directional Service	RT8
A9 – Streetlighting Exit Service	RT9
A10 – Unmetered Supplies Exit Service	RT10
A11 – Transmission Exit Service	TRT1
B1 – Distribution Entry Service	RT11
B2 – Transmission Entry Service	TRT2
B3 – Entry Service Facilitating a Distributed Generation or Other Non-Network Solution	RT23
C1 – Anytime Energy (Residential) Bi-directional Service	RT13
C2 – Anytime Energy (Business) Bi-directional Service	RT14
C3 – Time of Use (Residential) Bi-directional Service	RT15
C4 – Time of Use (Business) Bi-directional Service	RT16

Reference service	Reference tariff
A12 – 3 Part Time of Use Energy (Residential) Exit Service C9 – 3 Part Time of Use Energy (Residential) Bi-directional Service	RT17
A13 – 3 Part Time of Use Energy (Business) Exit Service C10 – 3 Part Time of Use Energy (Business) Bi-directional Service	RT18
A14 – 3 Part Time of Use Demand (Residential) Exit Service C11 – 3 Part Time of Use Demand (Residential) Bi-directional Service	RT19
A15 – 3 Part Time of Use Demand (Business) Exit Service C12 – 3 Part Time of Use Demand (Business) Bi-directional Service	RT20
A16 – Multi Part Time of Use Energy (Residential) Exit Service C13 – Multi Part Time of Use Energy (Residential) Bi-directional Service	RT21
A17 – Multi Part Time of Use Energy (Business) Exit Service C14 – Multi Part Time of Use Energy (Business) Bi-directional Service	RT22
C15 – Bi-directional Service Facilitating a Distributed Generation or Other Non-Network Solution	RT24
D1 – Supply Abolishment (Whole Current Metering) Service	RT25
D6 – Remote Direct Load Control Service	RT26
D7 – Remote Direct Load Limitation Service	RT27
D8 – Remote De-energise Service	RT28
D9 – Remote Re-energise Service	RT29

## 5.2 Exit Service Tariff Overview

An overview of the structure of each of the reference tariffs applicable to exit services is presented in the following sections.

### 5.2.1 RT1 and RT2

The tariff structure for distribution includes:

- A fixed charge per user, and
- A charge per kWh for energy consumption.

The tariff structure for transmission includes:

- A charge per kWh for energy consumption.

Energy only tariffs have no incentive for users to improve their load factor or shift energy consumption to off-peak.

### 5.2.2 RT3 and RT4

The tariff structure for distribution includes:

- A fixed charge per user;
- A charge per kWh for metered on-peak energy consumption; and
- A charge per kWh for metered off-peak energy consumption.

The tariff structure for transmission includes:

- A charge per kWh for metered on-peak energy consumption; and
- A charge per kWh for metered off-peak energy consumption.

Time of use tariffs have the incentive for users to manage their energy consumption to shift energy consumption from on-peak to off-peak. However, as noted earlier, these time of use tariffs do not adequately reflect the actual peak periods of the network.

### 5.2.3 RT5 – High Voltage Metered Demand

The tariff structure is based on the metered demand of the user, with a discount to the demand charge based on the ratio of off-peak energy to total energy used. In addition, the tariff has a demand length tariff component for users with demand greater than 1,000 kVA.

This tariff has a mix of incentives for the user to manage their electricity consumption.

The demand used is a running 12-month peak. This provides a clear incentive to manage the peak demand because any excessive demand recorded in one month then impacts upon the demand charge for the next 12 months. The demand length charge is also based on the running 12-month peak.

The second incentive is the off-peak energy discount which is based upon the ratio of off-peak energy to total energy used. The maximum discount is 30% for off-peak energy usage.

### 5.2.4 RT6 – Low Voltage Metered Demand

The tariff structure is identical to RT5 – High Voltage Metered Demand.

### 5.2.5 RT7 – High Voltage Contract Maximum Demand

The tariff structure requires the user to nominate a contracted maximum demand (CMD) that reasonably reflects their expected annual peak demand. In addition, the tariff has a demand length tariff component also based on the CMD. There is a monthly penalty for any demand excursion above the CMD. All prices are in terms of \$ per kVA.

The distribution component of the prices is zonal and there are 5 locational zones ranging from CBD to rural. This is because the costs of supply are seen to be dependent on the nature of the network that varies according to the location and consequent construction standard and cost.

There are also separate charges for administration and metering.

The transmission component of the tariff is nodal with prices based on the zone substation to which the user is connected.

This tariff has a mix of incentives for the user to manage their electricity consumption.

The demand is in kVA rather than kW so there is a clear benefit from managing the power factor as close to unity as possible. For example, improving the power factor from 0.7 to 0.8 will reduce the demand charge by 12.5%.

The second incentive is to manage the peak demand, which can be achieved by improving the load factor and by containing the peak demand. This incentive is very strong, and the user has flexibility in the options available for managing the demand. The penalty for exceeding the contract maximum demand provides additional incentive.

The demand length charge provides an incentive for the user to locate as close as possible to the zone substation. For existing users there is no real opportunity to respond to this incentive, but for new users there is some ability to respond.

The transmission component of the price is nodal so that there is a clear signal for users to locate near to the lower price substations. This may or may not be achievable depending on the individual user circumstances.

#### **5.2.6 RT8 – Low Voltage Contract Maximum Demand**

The tariff structure is identical to RT7 – High Voltage Contract Maximum Demand with the addition of a low voltage charge that reflects the additional cost for usage of the low voltage distribution network.

#### **5.2.7 RT9 – Streetlighting and RT10 – Unmetered Supplies**

Streetlights and unmetered supplies do not have metering information to support either the initial setting of the tariff or the billing of users based on energy consumption or energy demand and therefore the energy consumption must be estimated based on burn hours and globe wattage.

The tariff structure for distribution includes:

- A fixed charge per user; and
- A charge per kWh for calculated energy consumption.

The tariff structure for transmission includes:

- A charge per kWh for calculated energy consumption.

Where the asset is a Western Power maintained streetlight, there is a charge to reflect the capital and operating costs of the streetlight asset itself, revenue to recover these costs are included within the revenue target. The tariff structure for the streetlight asset is a fixed charge per light based on the type and rating of the light.

#### **5.2.8 TRT1 – Transmission**

The tariff is based on the zone substation to which the user is connected. The user will pay the use of system, common service and control system service charges. There is also a separate metering charge. All prices are in dollars per kW.

The tariff structure requires the user to nominate a CMD, in kW, that reasonably reflects their expected annual peak demand. There is a monthly penalty for any demand excursion above the CMD.

The incentive is clearly for the user to manage their peak demand through the initial nomination of the CMD and also the monthly penalty for exceeding the CMD.

## 5.3 Entry Service Tariff Overview

An overview of the structure of each of the reference tariffs applicable to entry services is presented in the following sections.

### 5.3.1 RT11 – Distribution

The transmission charge is identical to the charge for a transmission connected generator in that the generator nominates a declared sent out capacity (DSOC) and the charge is based on the transmission nodal price at the nearest transmission entry point. The transmission charge for use of system is in dollars per kW. Unlike the transmission exit reference tariff (TRT1) there is no common service charge. The generator must also pay the connection charge which is also expressed in terms of \$ per kW.

The generator's DSOC is in kW and is corrected for losses from the zone substation to the generator site, for purposes of calculation of the transmission price component.

The distribution charge is based on the zonal CMD demand length price. There is no demand only charge. As such the distribution charge for generators with demand less than 1,000 kVA is zero. There is also a separate metering charge.

The DSOC must be nominated in kW for the transmission charge and in kVA for the distribution charge. However, the power factor is assumed to be unity for the purpose of charging because the power factor will not generally be within the control of the generator.

The incentive for distribution-connected generators is to locate as near as possible to the zone substation although for generators with a DSOC less than 1,000 kVA there is no such incentive. However, small generators are not considered to require strong locational incentives because the network will generally not be impacted to any significant extent.

The transmission component also contains a locational signal. Like for TRT2 customers, there is a monthly penalty for any demand excursion above the DSOC that has not been authorised by System Management.

### 5.3.2 TRT2 – Transmission

The tariff is based on the zone substation to which the generator is connected. The generator will pay the entry point use of system and control system service charges. There is also a separate metering charge. All prices are in dollars per kW.

The tariff structure requires the generator to nominate a DSOC, in kW, that reflects their maximum intended export capacity. There is a monthly penalty for any demand excursion above the DSOC that has not been authorised by System Management.

## 5.4 Bi-directional Service Tariff Overview

An overview of the structure of each of the reference tariffs applicable to bi-directional services is presented in the following sections.

### 5.4.1 RT13 and RT14

The tariff structure for distribution includes:

- A fixed charge per user, and
- A charge per kWh for energy consumption.



The tariff structure for transmission includes:

- A charge per kWh for energy consumption.

#### **5.4.2 RT15 and RT16**

The tariff structure for distribution includes:

- A fixed charge per user;
- A charge per kWh for metered on-peak energy consumption; and
- A charge per kWh for metered off-peak energy consumption.

The tariff structure for transmission includes:

- A charge per kWh for metered on-peak energy consumption; and
- A charge per kWh for metered off-peak energy consumption.

Time of use tariffs have the incentive for users to manage their energy consumption to shift energy consumption from on-peak to off-peak. However, as noted earlier, these time of use tariffs do not adequately reflect the actual peak periods of the network.

#### **5.4.3 RT17 and RT18**

The tariff structure for distribution includes:

- A fixed charge per user
- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption

The tariff structure for transmission includes:

- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption

#### **5.4.4 RT19**

The tariff structure for distribution includes:

- A fixed charge per user
- A charge per kW for metered on-peak demand
- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption

The tariff structure for transmission includes:

- A charge per kW for metered on-peak demand
- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption

#### 5.4.5 RT20

The tariff structure for distribution includes:

- A fixed charge per user
- A charge per kVA for metered on-peak demand
- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption

The tariff structure for transmission includes:

- A charge per kVA for metered on-peak demand
- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption

#### 5.4.6 RT21

The tariff structure for distribution includes:

- A fixed charge per user
- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption
- A charge per kWh for metered overnight energy consumption

The tariff structure for transmission includes:

- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption
- A charge per kWh for metered overnight energy consumption

#### 5.4.7 RT22

The tariff structure for distribution includes:

- A fixed charge per user
- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption
- A charge per kWh for metered overnight energy consumption

The tariff structure for transmission includes:

- A charge per kWh for metered on-peak energy consumption
- A charge per kWh for metered shoulder energy consumption
- A charge per kWh for metered off-peak energy consumption
- A charge per kWh for metered overnight energy consumption

## **5.5 Other Tariffs Overview**

### **5.5.1 RT23**

The tariff structure is identical to RT11, with the inclusion of a discount that represents the benefit provided to the Western Power Network.

### **5.5.2 RT24**

The tariff structure is identical to RT5- RT8 and RT13 – RT22 (as applicable), with the inclusion of a discount that represents the benefit provided to the Western Power Network.

### **5.5.3 RT25**

RT25 consists of a charge per connection point supply abolishment.

### **5.5.4 RT26**

RT26 consists of a charge per request to remotely control load.

### **5.5.5 RT27**

RT27 consists of a charge per request to remotely limit load.

### **5.5.6 RT28**

RT28 consists of a charge per request for de-energisation.

### **5.5.7 RT29**

RT29 consists of a charge per request for re-energisation.

## 6. Derivation of Transmission System Tariff Components

This section describes the methodology used to calculate transmission reference tariff components.

### 6.1 Cost Reflective Network Pricing

#### 6.1.1 General

The Cost Reflective Network Pricing (CRNP) cost allocation method allocates the revenue requirement to all network elements, based on their GODV, then determines the use made of each network element by each connection point during the survey period.

The CRNP cost allocation process requires detailed network analysis and involves the following steps:

1. Determining the annual revenue requirement for individual transmission shared network assets (see below);
2. Determining the network load and generation pattern;
3. Performing a load-flow to calculate the MVA loading on network elements;
4. Determining the allocation of generation to loads;
5. Determining the utilisation of each asset on the network by each connection point;
6. Allocating the revenue requirement of individual network elements to each user based on the assessed usage share; and
7. Determining the total cost allocated to each connection point by adding the share of the costs of each individual network element attributed to each point in the network.

#### 6.1.2 Allocation of Generation to Load

A major assumption in the use of the CRNP methodology is the allocation of generation to load using the 'electrical distance'. With this approach, a greater proportion of load at a particular location is supplied by generators that are electrically closer than those that are electrically remote. The electrical distance is the impedance between the two locations, and this can readily be determined through a standard 'fault level calculation'. Once the assumption has been made as to the proportion that each generator actually supplies each load for a particular load and generation condition (time of day) it is possible to trace the flow through the network that results from supplying each load (or generator).

The utilisation that any load makes of any element is then simply the ratio of the flow on the element resulting from the supply to this load to the total flow on the element made by all loads and generators in the system.

#### 6.1.3 Operating Conditions for Cost Allocation

The choice of operating conditions is important in developing prices using the CRNP methodology. The use made of the network by particular loads and generators will vary depending on the load and generation conditions on the network at the time. The National Electricity Rules (NER) sets out principles that could be applied to determine the sample of operating conditions to consider.

The load and generation patterns used to establish transmission prices should include all operating scenarios that result in most stress in the network and for which network investment may be contemplated. The operating conditions chosen should broadly correspond to the times at which high demands drive network expansion decisions. Operating conditions should be included that impose peak

loading conditions on particular elements, recognising that these may occur at times other than for peak demand.

Consistent with these principles, the operating conditions to be used for the cost allocation process for the transmission system are as follows:

- Load and generation conditions shall be actual operating conditions from 12 months prior; and
- Operating conditions shall include data for every node for every half hour where system peak demand is greater than an amount such that data from 10 individual summer days and 10 individual winter days are included.

## **6.2 Price Setting for Transmission Reference Services**

Transmission tariffs for exit and entry services are fixed and are generally expressed as dollars/kw/annum. Generally, transmission prices are derived by dividing the cost pool, either in its entirety or at a zone substation level, by the assigned maximum demand applying to those assets. However, the details of some parts of the process are complex and explained in more detail in the following sections.

### **6.2.1 Transmission Pricing Model**

Once Transmission assets are valued and T-price (see below for details) has established the relativity of Use of System (UOS) prices the Transmission Pricing Model is used:

1. to calculate the annual revenue requirements for all respective cost pools (based on valuation data and the rate of return required); and
2. to scale the raw T-price derived UOS prices to give the required UOS cost pool revenues.

### **6.2.2 Connection Price**

The Connection Price is a price for the utilisation of Western Power owned connection assets. The Connection Price reflects the total annual costs allocated to the connection assets divided by the total usage at all points. The Connection Price is calculated by taking the Connection Cost Pool Revenue and dividing it by the aggregate of relevant CMDs and DSOCs (over all Exit or Entry points where the charge is applied).

Connection charges for connection points on the distribution system will be differentiated between loads and generators by applying the principles applied to the transmission shared system.<sup>1</sup> This results in generators paying approximately a quarter of the price as for loads.

Connection charges for connection points on the transmission system are not published but are determined subject to the specific connection arrangements. These connection charges are individually calculated to reflect the actual connection assets that apply to that user. The amount of the charge is based on achieving a regulated return on all relevant assets and an allocation of the transmission network operating costs.

### **6.2.3 UOS Prices**

Consistent with the NER, the proportion of the transmission reference service revenue that is allocated to Transmission UOS is allocated to each and every connection point using a CRNP method. CRNP assigns a proportion of shared network costs to individual user connection points.

---

<sup>1</sup> By adopting the principle of 20 per cent of costs being allocated to generation and the remaining 80 per cent to loads.

#### 6.2.3.1 T-Price

Western Power uses T-price to establish the relativity of UOS prices for each exit and entry point. T-price is a modelling tool to allocate network costs using CRNP. T-price requires significant work to establish all of the inputs and to run the model, in summary:

- The GODV of every branch and node of the network is allocated. Every node is classified as either Exit or Entry, and every branch is classified as either shared or dedicated to consumers or dedicated to generators.
- Electrical configuration and parameters of the network are established (PSSE system Raw Data file).
- Interval data is assembled for all entry and exit points.
- Load flow analysis is carried out so that all network element costs are allocated to each zone substation based on usage of those network elements.
- The costs for all entry and exit points are then converted to prices by assigning a maximum demand to each node and using that demand to calculate a price in terms of dollars/kW/annum.

#### 6.2.3.2 UOS Price Moderation

The application of CRNP for UOS prices can introduce volatility to individual prices as a result of changes in network usage beyond the control of any one user. It is hence appropriate to moderate any price fluctuations to mitigate price shock and improve certainty to customers. Annual variations to UOS prices are therefore scaled and moderated such that annual changes are constrained within a band of  $\pm 5\%$ .

#### 6.2.4 Common Service Price for Loads

The Common Service Price is expressed in cents/kW/day and is uniform for all exit points. The Common Service Price is calculated by taking the Common Service Cost Pool Revenue and dividing it by the aggregate of relevant CMDs (over all Exit points where the charge is applied).

#### 6.2.5 Control System Service Price

The Control System Service Price is expressed in cents /kW/day. Separate Prices for consumers and generators are calculated based on the respective cost pools but are uniform for each.

##### 6.2.5.1 Control System Service for Loads

The Control System Services price for Loads is calculated by taking the Control System Services for Loads Cost Pool Revenue and dividing it by the aggregate of relevant CMDs (over all Exit points where the charge is applied).

##### 6.2.5.2 Control System Service for Generators

The Control System Services price for Generators is calculated by taking the Control System Services for Generators Cost Pool Revenue and dividing it by the aggregate of relevant DSOCs (over all Entry Points where the charge is applied).

#### 6.2.6 Transmission Tariff Setting

The following table details the forecast transmission revenue which will be collected from transmission connection points and the total amount that will be collected from distribution connection points (please see section 6.3 for further details).

**Table 6.1 - Transmission Revenue Forecast for 2019/20 (\$M Nominal)**

Customer type	Forecast Total MW	Number Customers	Forecast Transmission Revenue Recovered
Transmission Exit	695	31	35.1
Transmission Entry	5535	31	47.0
Distribution Users	3,792		273.4
Transmission Standby			2.7
Total Revenue Target Revenue			<b>358.2</b>

### 6.3 Price Setting for Distribution Reference Services

The tariffs for connection points on the transmission system do not collect the full transmission reference service revenue entitlement. Connection points on the distribution system utilise the transmission system as well as the distribution system. The remainder of the transmission reference service revenue entitlement is collected from tariffs for connection points on the distribution system.

Charges are determined for each direct connected transmission user based on respective CMDs. The revenue from these users is then deducted from the revenue entitlement for that substation to give a net revenue amount to be recovered from users connected to that substation via tariffs for connection points on the distribution system.

Reference tariffs for users connected to the distribution system with a peak demand >1 MVA incorporate transmission nodal prices. The transmission pass-through revenue, net of the revenues from the >1 MVA users, is then allocated in aggregate to the various small customer groupings on the basis of loss adjusted any time maximum demand (ATMD) for each grouping (further described below).


A number of processes take place to determine transmission prices that match the structure of distribution reference tariffs so that a full suite of bundled tariffs can be produced.

Transmission prices take a range of forms, as discussed in section 5. The CMD tariffs are based on a nominated peak demand in terms of kVA. The CMD tariffs are nodal in that they are based on the transmission node to which the load user is connected. All other tariffs are uniform across the Western Power Network.

#### 6.3.1 Flow Chart

The process to derive prices is illustrated in the following flow diagram.

**Figure 3: Derivation of Transmission Tariff Component of Distribution System Flow Chart**

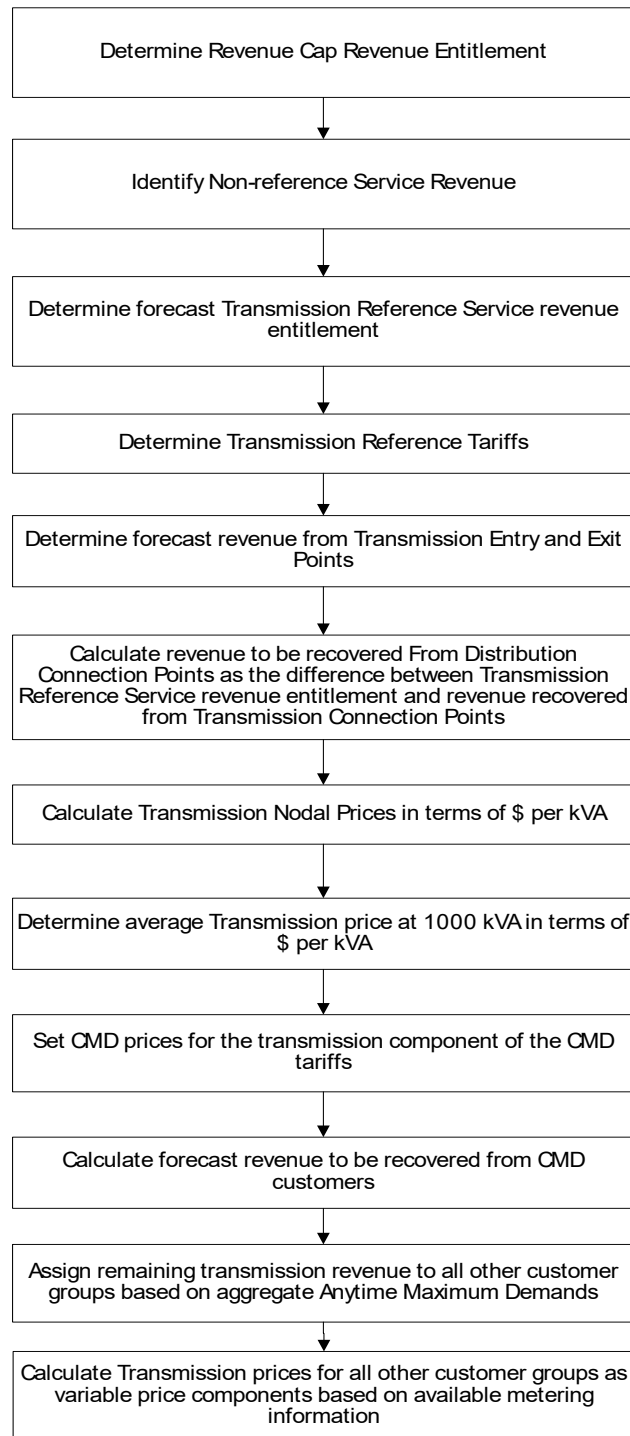

Each step in this process to derive transmission component of the distribution system reference tariffs is described in more detail as follows. The first two steps of determining the revenue entitlement and prices for transmission connected users have been covered earlier in this section.

### **6.3.2 Calculate the Forecast Revenue to be recovered from Distribution-Connected Users**

It is assumed at this stage of the process that the forecast transmission revenue entitlement has been determined and transmission reference tariffs set. By applying the reference tariffs to the forecast transmission-connected user data, the revenue to be recovered from transmission entry and exit points can



be forecast. The residual is the revenue that must be recovered from connection points on the distribution system.

### **6.3.3 Calculate Transmission Nodal Prices in terms of \$ per kVA**

To calculate the transmission prices in terms of dollars per kVA the zone substation power factors must be determined. The power factors are measured at the low voltage bus of the zone substations at system peak. To create a single nodal price the transmission use of system, common service and connection prices are added together for each zone substation. Multiplying that price by the power factor then provides the price in terms of dollars/kVA.

There is an additional factor taken into account at this stage. The Urban and CBD prices are set to be uniform for distribution-connected users. To achieve this, a weighted average transmission nodal price and a weighted average power factor are used.

This step is taken for a number of reasons. It does not make sense for users across the Perth metropolitan area to see a range of prices depending on location. For example, users can be connected to one zone substation for a period of time and then transferred to a different zone substation for operational reasons. Individual zone substation nodal prices would result in such a user seeing a price change although they had not changed anything from their perspective. From an administrative perspective it would be very difficult to manage such a situation. Price changes would also need to be managed within any side constraints imposed on price movements.

Another reason for this approach is that nodal prices are designed to give users an economic signal in terms of location. However, in an urban environment it is difficult for users to respond to any economic signal because land zoning and availability will normally be the determining factor in location rather than cost of supply.

This process produces a set of zone substation prices that are individual for Rural, Mixed and Mining substations and uniform for the CBD and Urban substations. These transmission nodal prices apply to connection points on the distribution system with demands equal to or greater than 7,000 kVA. This principle is established because the cost that a 7,000 kVA user imposes on the transmission network will be the same whether connected to the distribution or transmission networks.

For users with CMD below 7,000 kVA the factor of load diversity becomes more relevant. In addition, the price must be structured to fit into the bundled tariff structure for all CMD users with demands greater than 1,000 kVA.

### **6.3.4 Determine Average Transmission Price at 1,000 kVA**

At this stage we have the transmission nodal prices at 7,000 kVA. We also have established that the transmission price in terms of \$/kVA at 1,000 kVA will be uniform for all users and will be the same from 0 to 1,000 kVA. The next task is to establish that uniform price.

Transmission costs are allocated to all users on the basis of anytime peak kVA demand. The transmission price is simply the revenue to be recovered from users with demands below 1,000 kVA divided by the sum of the anytime maximum demands of all those users.

The anytime maximum demands are not metered for the vast majority of users with demands below 1,000 kVA. The energy consumption is metered, and the anytime maximum demands are estimated by applying load factors based on Industry Codes. The industry codes and associated load factors were developed using sample data for actual representative user types.

At this stage the size of the revenue pool is not established. The revenue pool will be the amount defined by the following formula:

$$RP_{\text{Below 1,000}} = RP_{\text{Total}} - RP_{\text{Over 7,000}} - RP_{\text{1,000 to 7,000}}$$

where,

$RP_{\text{Below 1,000}}$  = revenue to be recovered from users with demands below 1,000 kVA

$RP_{\text{Total}}$  = revenue to be recovered from all distribution connected users

$RP_{\text{Over 7,000}}$  = revenue to be recovered from users with demands greater than 7,000 kVA

$RP_{\text{1,000 to 7,000}}$  = revenue to be recovered from users with demands between 1,000 and 7,000 kVA

This equation has unknown elements in several terms at this stage. The revenue to be recovered from users with demands greater than 7,000 kVA is known because it is equal to the forecast demands of those users multiplied by the nodal price for each user.

The next step is to determine the pricing structure for users with demands between 1,000 and 7,000 kVA. To facilitate the bundling of transmission and distribution components in reference tariffs for connection points on the distribution system the transmission price structure must be consistent with the distribution price structure. For these users this means the prices will be in 'rate block' structure and take the form:

$$\text{User Charge}_{\text{1,000 to 7,000}} = (\text{Price}_{\text{At 1,000}} * 1,000 \text{ kVA}) + (\text{Price}_{\text{1,000 to 7,000}} * (\text{CMD}_{\text{User}} - 1,000 \text{ kVA}))$$

Where:

$\text{User Charge}_{\text{1,000 to 7,000}}$  = the use of system charge for a user with CMD between 1,000 and 7,000 kVA

$\text{Price}_{\text{At 1,000}}$  = the average use of system price for all users with CMD below 1,000 kVA

$\text{Price}_{\text{1,000 to 7,000}}$  = the use of system for this user with CMD between 1,000 and 7,000 kVA

$\text{CMD}_{\text{User}}$  = the contract maximum demand for that user

The  $\text{Price}_{\text{1,000 to 7,000}}$  will be different for each zone substation but can be calculated by the formula:

$$\text{Price}_{\text{1,000 to 7,000}} = [(\text{Price}_{\text{At 7,000}} * 7,000 \text{ kVA}) - (\text{Price}_{\text{At 1,000}} * 1,000 \text{ kVA})] / 6,000 \text{ kVA}$$

So there is now a formula to calculate the price for each user with CMD between 1,000 and 7,000 kVA with the unknown being the price at 1,000 kVA. There is a single unknown ( $\text{Price}_{\text{At 1,000}}$ ) that can be solved in the above equation which can be expanded as below.

Original Equation:

$$RP_{\text{Below 1,000}} = RP_{\text{Total}} - RP_{\text{Over 7,000}} - RP_{\text{1,000 to 7,000}}$$

Expansion of each term:

$$RP_{\text{Below 1,000}} = \sum \text{User anytime maximum demands multiplied by Price At 1,000}$$

$$RP_{\text{Total}} = \text{Total transmission revenue entitlement allocated to distribution-connected users}$$


$RP_{\text{Over } 7,000} = \sum \text{Individual demands for users greater than 7,000 kVA anytime maximum demands multiplied by the nodal price at the zone substation to which the user is connected}$

$RP_{1,000 \text{ to } 7,000} = \sum \text{User charges for all users with CMDs between 1,000 and 7,000 kVA}$

At this stage of the process the average price at and below 1,000 kVA, the nodal price for each zone substation for demands between 1,000 and 7,000 kVA and the nodal price for demands greater than 1,000 kVA are known. This has set the transmission tariffs for CMD users.

The rate blocks were developed using the principle of a straight-line transition from the charge at 1,000 kVA to the charge at 7,000 kVA. When converted back to prices the actual prices at any demand can be mapped and in fact the transition from a flat price below 1,000 kVA to a flat price above 7,000 kVA is a  $1/x$  curve. The following graph illustrates the price outcomes for the above process. A number of substations have been chosen to represent the range of prices across urban and rural substations.

**Figure 4: Rate Blocks Example**

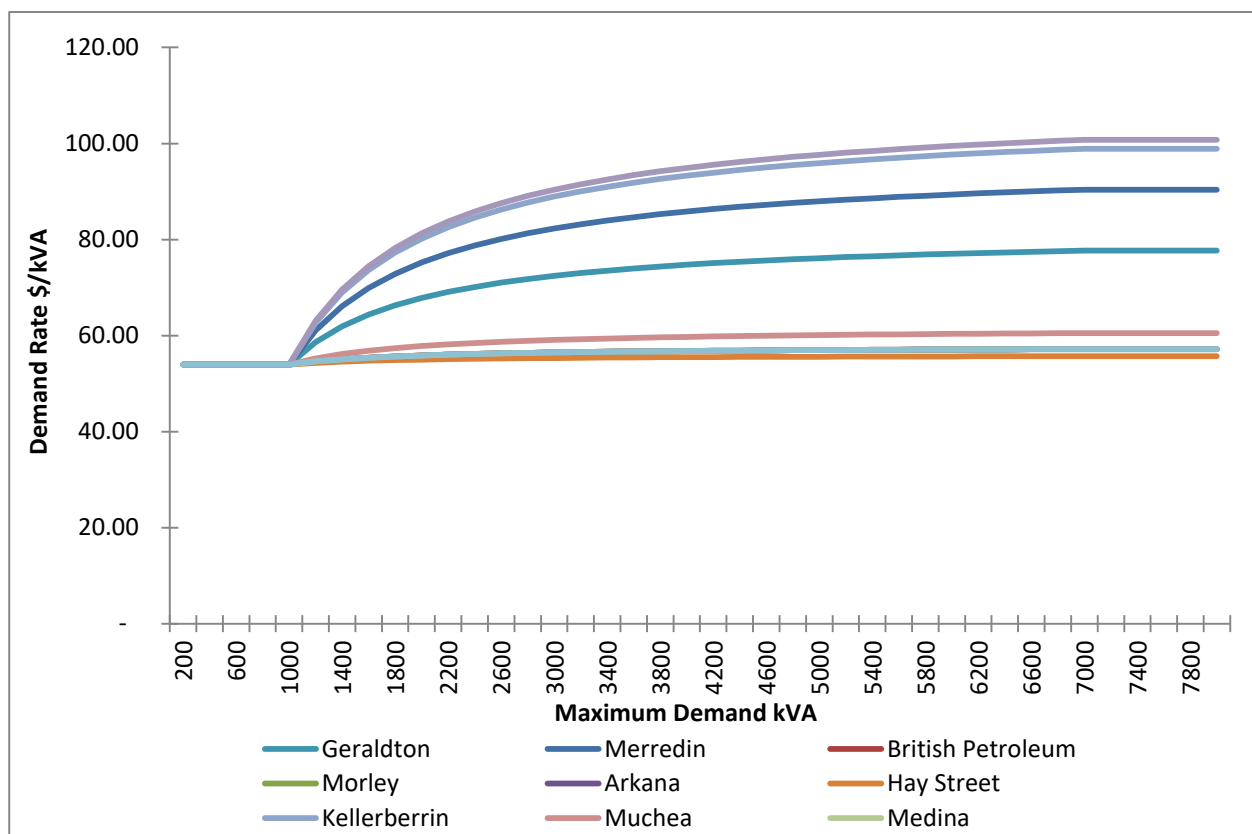

### 6.3.5 Calculate Transmission Revenue to be recovered from users with demands below 1,000 kVA

This has been determined in the previous section in that the revenue is the average price multiplied by the sum of the anytime maximum demands of all users with demands less than 1,000 kVA.

### 6.3.6 Calculate Transmission Prices for all other Customer Groups

The first step in this process is to allocate the total revenue entitlement for all users with demands below 1,000 kVA to the customer groups within this category. The customer groups are restated for reference.

- General Business Large (300 to < 1,000 kVA maximum demand)
- General Business Medium (100 to < 300 kVA maximum)

- General Business Small (15 to < 100 kVA maximum demand)
- Small Business (<15 kVA maximum demand)
- Residential
- Streetlights
- Unmetered Supplies

The result of this process is an amount of revenue that must be recovered within each customer group. At this stage the customer group users are mapped to reference tariff groups together with their associated revenues.

In the case of Transmission reference tariff components, the cost pools are allocated on the basis of demand. The tariffs now being considered do not have metered values for demand and on that basis; energy is used as a proxy for demand. The revenue is recovered entirely through the variable component of the tariffs, which in each of these tariffs is the energy rate. Thus, the tariff components are in terms of cents per kWh.

In the case of unmetered supplies, streetlights, energy small and energy large tariffs the price is calculated by the formula:

$$\text{Price}_{\text{Tariff}} = \text{Forecast Revenue Entitlement for Tariff} / \text{Total Forecast Energy for Tariff}$$

In the case of the time of use energy tariffs the transmission revenue allocated to those tariffs is recovered through both the on-peak and off-peak energy amounts. It is essentially the on-peak demand and therefore on-peak energy that drives the cost of the transmission network. However off-peak energy must also be served, and a proportion of the revenue is recovered through the off-peak energy.

Approximately 30% of the forecast revenue entitlement is recovered through the off-peak energy and 70% through the on-peak energy. This ratio is chosen to achieve three outcomes:

- It recovers most of the cost from on-peak usage which is the main driver of transmission costs;
- It allows for a portion of the costs to be recovered from off-peak energy usage to provide for equity between users with different load patterns; and
- It provides an economic signal to encourage off-peak energy usage that has the benefit of reducing network costs resulting in lower reference tariffs for all users.

### 6.3.7 Transmission Components of Distribution Reference Tariffs Forecast Revenue

The following table details the forecast transmission reference service revenue, by tariff, which will be collected from distribution connection points.

**Table 6.2: Transmission Reference Service Revenue Recovered from Distribution Connection Points for 2019/20 (\$M Nominal)**

Reference Tariff	kWh	Number Customers	Forecast Transmission Revenue Recovered
RT1 - Anytime Energy (Residential)	4,035,000,000	803,312	82.3
RT2 - Anytime Energy (Business)	930,000,000	72,319	22.8

Reference Tariff	kWh	Number Customers	Forecast Transmission Revenue Recovered
RT3 - Time of Use Energy (Residential)	53,000,000	7,465	1.0
RT4 - Time of Use Energy (Business)	829,000,000	9,421	19.7
RT5 - High Voltage Metered Demand	758,000,000	296	9.1
RT6 - Low Voltage Metered Demand	2,037,000,000	3,967	38.0
RT7 - High Voltage Contract Maximum Demand	3,109,000,000	291	61.9
RT8 - Low Voltage Contract Maximum Demand	186,000,000	58	5.1
RT9 – Streetlighting	141,000,000	288,415	1.8
RT10 - Unmetered Supplies	40,000,000	16,493	0.3
RT11 - Distribution Entry	-	-	1.3
RT13 – Anytime Energy (Residential) Bi-directional	1,051,000,000	244,678	21.4
RT14 – Anytime Energy (Business) Bi-directional	123,000,000	1,363	3.0
RT15 – Time of Use (Residential) Bi-directional	52,000,000	10,159	1.0
RT16 – Time of Use (Business) Bi-directional	161,000,000	887	3.9
RT17 - Time of Use Energy (Residential)	-	-	-
RT18 - Time of Use Energy (Business)	-	-	-
RT19 – Time of Use Demand (Residential)	-	-	-
RT20 – Time of Use Demand (Business)	-	-	-
RT21 – Multi Part Time of Use Energy (Residential)	-	-	-
RT22 – Multi Part Time of Use Energy (Business)	-	-	-
<b>TOTAL - Reference Service</b>			272.7
<b>TOTAL – Non-Reference Service</b>	-	-	0.7
<b>TOTAL</b>	<b>13,505,000,000</b>	<b>1,459,194</b>	<b>273.4</b>

## 6.4 Annual Price Review

As described in the *access arrangement*, revenue target revenue is reviewed annually. Together with changes to user CMDs and DSOCs (including zone substation maximum demands) it is consequently necessary to adjust prices annually also.

## 6.5 Compliance with sections 7.3 (b) and 7.6 of the Code

This section sets out how Western Power's *transmission tariffs* comply with sections 7.3(b) and 7.6 of the Code.

Section 7.3(b) of the Code requires that *reference tariffs* are set between the 'incremental costs of service provision' and 'stand-alone costs of service provision'.

'Incremental costs of service provision' means:

*'that part of approved total costs that would be avoided by the service provider ... if it were not to provide the covered service ... to the group of users'.*

'Stand-alone cost of service provision' means:

*'that part of approved total costs that the service provider would incur in providing the covered service to the ... group of users .. if the covered service provided ... was the sole group of users supply by the service provider...'*

Western Power has determined values for each of these concepts for each of the transmission reference services.

For the definition of incremental costs, the total costs that are avoided are a portion of the costs that Western Power incurs in performing its network operations activities. All other activities, e.g. asset maintenance and replacement would still be performed. Network operations expenditure between loads and generators has been allocated evenly (i.e. 50% each) and is based on the operational expenditure forecast within the access arrangement period.

For the definition of stand-alone costs, Western Power has determined that within a financial year, other than the network operations costs identified above, all other costs would still apply to both transmission connected generators and loads.

**Table 6.3: Demonstration Transmission Reference Tariffs are between incremental and stand-alone cost of service provision for 2019/20 (\$M Nominal)**

Reference Service	Reference Tariff	Incremental Cost of Service	Stand-alone Cost of Service Provision	Forecast Revenue Recovered from Reference Tariff
A11	TRT1	2.3	355.9	35.1
B2	TRT2	2.3	355.9	47.1

Section 7.6 of the Code requires:

*'unless an alternative pricing method better meets the Code objective, then incremental costs need to be recovered by variable components.'*

Western Power proposes to use an alternative pricing method, namely the method outlined in this Price List Information, to price transmission services on the basis that the method better meets the Code objective.

Applying the steps outlined in section 7.6 would result in *transmission tariffs* that largely do not vary with usage or demand. That is, with the exception of the small incremental costs, the balance of transmission revenue would be recovered evenly on a per network user basis. This means that all transmission

connected loads and generators would be charged a flat fee with a very small variable component, regardless of their size and how much of the downstream network they use. This outcome does not facilitate the Code objective to *'to promote the economically efficient investment in and operation and use of, networks and services of networks in Western Australia in order to promote competition in markets upstream and downstream of the networks.'* Western Power's approach set out in this Price List Information of pricing transmission usage based on the capacity share and the usage of the network during peak periods better achieves the Code objective.

For distribution reference tariffs, compliance is demonstrated in section 7.3 of this document.

## 7. Derivation of Distribution System Tariff Components

This section describes the methodology used to calculate distribution reference tariff components.

The cost allocation process reflects the costs of supply for a customer group reasonably accurately. The process for determining prices for that customer group, while ideally similar in principle, is somewhat different in that it must take into account other factors such as equity, simplicity and efficiency (e.g. existing metering type).

Prices are determined with pre-loss-adjusted ATMDs.

The *Code* requires uniform reference tariffs for all users with annual energy demand below 1 MVA, which equates to approximately all but 500 connected to the Western Power Network. Users with energy demand below 1 MVA will exhibit the full range of energy consumption patterns. It is therefore clear that any tariff structure will not be totally cost reflective. However, the assumptions that are made in allocating users to particular load groups and in deriving the cost of supply to those customer groups, and the consequent prices, are all considered reasonable. Through the process described in this paper the tariff settings are derived through a rigorous process taking into account the information available and the requirements of the *Code*.

The distribution reference tariff components include the costs associated with the TEC. Section 7.12 of the *Code* sets out the requirement for Western Power to recover TEC through distribution reference tariffs for exit services (Western Power has extended this to include bi-directional services to be consistent with the Code Objective). Section 7.6 details the amounts associated with TEC that are embedded within the distribution reference tariff components.

### 7.1 Price Setting

This section details the methodology used to derive the tariff components from the cost pools, customer groups and locational zones.

#### 7.1.1 Tariff Components

Distribution reference tariffs have been developed to enable users with different loads and usage patterns to choose the most appropriate form for them. The tariffs have fixed and variable components and are generally compatible with existing forms of user metering.

The components of each reference tariff are shown in the following table.



**Table 7.1: Distribution Reference Tariff Components**

TARIFF	TARIFF COMPONENTS										
	Fixed Component	Energy Only	On-Peak Energy	Shoulder Energy	Off-Peak Energy	Metered Demand	Annual Metered Demand	Off-Peak Discount Factor (%)	CMD/DSOC	Demand/ Length for ATMD > 1,000 kVA	Fixed Metering Component
RT1 – Anytime Energy (Residential)	✓	✓									✓
RT2 – Anytime Energy (Business)	✓	✓									✓
RT3 - Time of Use Energy (Residential)	✓		✓		✓						✓
RT4 - Time of Use Energy (Business)	✓		✓		✓						✓
RT5 - HV Metered Demand	✓					✓	✓	✓		✓	✓
RT6 - LV Metered Demand	✓					✓	✓	✓		✓	✓
RT7 - HV CMD	✓								✓	✓	✓
RT8 - LV CMD	✓								✓	✓	✓
RT9 - Streetlighting	✓	✓									
RT10 – Unmetered Supplies	✓	✓									
RT11 - Distribution Entry									✓	✓	✓
RT13 – Anytime Energy (Residential) Bi-directional	✓	✓									✓
RT14 – Anytime Energy (Business) Bi-directional	✓	✓									✓
RT15 – Time of Use (Residential) Bi-directional	✓		✓		✓						✓
RT16 – Time of Use (Business) Bi-directional	✓		✓		✓						✓
RT17 –Time of Use Energy (Residential)	✓		✓	✓	✓						✓
RT18 –Time of Use Energy (Business)	✓		✓	✓	✓						✓
RT19 –Time of Use Demand (Residential)	✓		✓	✓	✓	✓					✓
RT20 –Time of Use Demand (Business)	✓		✓	✓	✓	✓					✓

TARIFF		TARIFF COMPONENTS									
RT21 – Multi Part Time of Use Energy (Residential)	✓	✓	✓	✓	✓						✓
RT22 – Multi Part Time of Use Energy (Business)	✓	✓	✓	✓	✓						✓

#### 7.1.2 The tariff comprises a fixed component (\$/annum) and a variable component (cents/kWh)

This is the simplest and most appropriate charging methodology for large numbers of small users with existing energy only metering.

The fixed and variable components are set to best recover the costs associated with the smaller customer groups. The tariff components for residential and business are different, reflecting the different costs of supply.

#### 7.1.3 RT3 and RT4 - Time of Use Energy Tariff (Residential or Business)

The tariff comprises a fixed component (\$/annum) and variable on- and off-peak energy components (cents/kWh).

The tariff components for residential and business are different, reflecting the different costs of supply.

The fixed component of the residential time of use tariff is set to be the same as the fixed component of the residential energy only tariff.

Analysis of system load profiles by other utilities shows that typically 70% and 30% of network costs are associated with on- and off-peak load respectively. The on- and off-peak energy components of the tariffs are set to recover these approximate proportions of the variable cost pools for the respective customer groups.


#### 7.1.4 RT5 and RT6 - Metered Demand Tariff (HV and LV)

The metered demand tariff is based on a metered annual any time maximum demand with a discount to give credit for off-peak energy usage as a proportion of total energy used.

The annual any time maximum demand is the rolling peak value over the previous 12 months. This rolling peak, rather than a monthly-metered peak, is chosen for compatibility with the CMD tariffs that are based on a contracted maximum demand set for a defined period. A tariff based on a metered monthly peak would need to be higher to recover the same revenue from these users due to the effect of seasonal variation in loads.

The principle of using this rolling peak is illustrated in Figure 5.

**Figure 5: Rolling Peak Illustration**

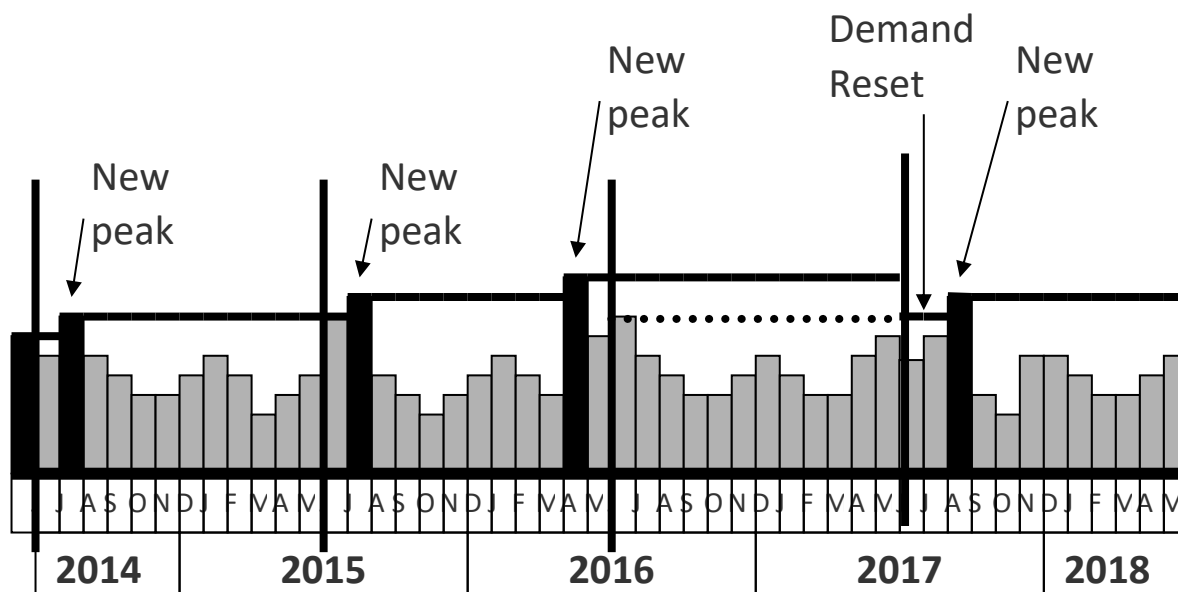

There is no excess network usage charge for this tariff. The incentive to control the peak demand is significant because any half-hourly excess peak would be retained in the charges for a full 12 months. However, this is not intended to be unreasonably punitive to users and the negative impact of an extraordinary event would be assessed on a case by case basis.

If a user, or its customer, has implemented initiatives to reduce the future maximum demand on a permanent basis including:

- the implementation of load control, energy efficiency equipment or solutions at the connection point; or
- a fundamental change in the nature of the business or operation conducted at the connection point; or
- a shutdown of the business or operation conducted at the connection point; or
- some other special circumstance or arrangement that reduces the maximum demand at the connection point

then

the user may apply to Western Power for the rolling 12 month period and maximum metered demand to be reset.

The application must include a forecast of maximum demand over the future 12 month period, details of why the user expects the demand will be lower, evidence to support the change and the date the user wishes the revised maximum metered demand to apply from. If Western Power considers, as a reasonable and prudent person and in accordance with good electricity industry practice, that the revised maximum metered demand is reasonable, Western Power must reset the rolling 12 month period and maximum demand in line with the application.

If the actual maximum metered demand exceeds the reset maximum metered demand within 12 months of the reset, an adjustment will be made to charges as though the actual maximum metered demand had applied from the date the reset was implemented.

The off-peak discount is applied monthly, based on the metered off-peak and total energy amounts. The discount is intended to create an incentive for users to use the network off-peak, and is provided as a specific reduction in the monthly charge depending on the proportion of off-peak energy used.

The tariff also includes a 'demand-length' component for demands greater than 1,000 kVA, identical to that applying in the CMD tariffs, based on the rolling annual peak.

The demand price is in rate block format. The transition points are set at 300 kVA and 1,000 kVA and the discount phases out at 1,500 kVA. At 1,500 kVA the tariff is set to be less attractive than the CMD tariffs for most users.

A discount mechanism applies to this tariff and is defined within the Price List.

#### **7.1.5 RT7 and RT8 - Contract Maximum Demand Tariff (HV and LV)**

The HV component of the CMD tariff is set to reflect a price that results in a user charge that is greater than the user incremental cost of supply but less than the stand-alone cost of supply. To achieve this outcome the two costs of service are modelled for each of the HV and LV CMD users.

Customers on transition tariffs are modelled, for pricing setting purposes, as contract maximum demand tariff customers.

The price structure is based on two particular components. There is a component that is directly linked to the nominated maximum demand which is in terms of \$/kVA. The second component is based on a combination of the maximum demand and the length of HV feeder from the zone substation to the user's connection point. This price component is expressed in terms of \$/kVA.km. Both of these tariff components are set to be uniform at 1,000 kVA and to be fully cost reflective at 7,000 kVA. This structure is consistent with the transmission CMD tariff for distribution connected customers.

The demand-length component of the tariff cannot be used in isolation because it distorts the charge for users either very close to the zone substation, where the cost could be virtually zero, or at a long distance from the substation, where the charge could be unreasonably high. The demand-based components of the tariff ameliorate this distortion as it recognises the cost of supply of a user does not only relate to the distance from the zone substation but also relates to the demand the user places on the network.

The effect of the pricing structure is, for a fixed demand, the charge to a user increases as distance to the zone substation increases. This is effectively providing a fixed and variable component to the price for identical users depending on their distance from a zone substation. In a similar manner, users at the same distance from a zone substation will pay more as their demand increases.

An additional feature of this price structure is that the price is not linear in relation to the demand.

For the demand-based component, the price at 1,000 kVA is uniform for each of the locational zones and is reflective of the average HV cost of the network per KVA demand. However, as the demand increases, the price declines recognising that the cost of supply declines on a per unit basis, as the demand increases.

The demand-length component is set to zero at 1,000 kVA. This is consistent with the requirement that all tariffs are uniform below 1,000 kVA demand. The price above 7,000 kVA is uniform, and the price varies continuously between 1,000 and 7,000 kVA.

In setting the CMD tariffs both components are adjusted so that for each of the users with demands greater than 1,000 kVA, their charge will fall between the incremental and stand-alone cost. The process to derive the settings is described as follows.

### **Demand Component of the CMD Tariff**

The price at 7,000 kVA is individually set for each zone. The price is adjusted to provide a best fit so that users will see a charge that is between the incremental and stand-alone cost. This is done in combination with the demand-length component setting. However, it is clear that the price at 7,000 kVA should reflect the actual costs of the networks that supply these users. As such the cost for the CBD zone will be the highest, the Urban zone the next highest and so on so that the rural zone is the cheapest.

The distribution nodal prices at 7,000 kVA have been established. It has also been established the distribution price in terms of \$/kVA at 1,000 kVA will be uniform for all users and will be the same from 0 to 1,000 kVA. The next step is to establish that uniform price. At 1,000 kVA the demand-length price is zero, so the demand price should reflect the average network price for all users in terms of \$/kVA.

Distribution costs are allocated to all users on the basis of anytime peak kVA demand adjusted for losses. The distribution price is simply the revenue to be recovered from users with demands below 1,000 kVA divided by the sum of the anytime maximum demands of all those users.

The anytime maximum demands are not metered for the vast majority of users with demands below 1,000 kVA. The energy consumption is metered and the anytime maximum demands are estimated by applying load factors based on 'industry codes'. The industry codes and associated load factors were developed using sample data for actual representative user types.

At this stage the size of the revenue pool for users with demands below 1,000 kVA is not established. The revenue pool will be the amount defined by the following formula:

$$RP_{\text{Below 1,000}} = RP_{\text{Total}} - RP_{\text{Over 7,000}} - RP_{\text{1,000 to 7,000}}$$

where:

$RP_{\text{Below 1,000}}$  = revenue to be recovered from users with demands below 1,000 kVA

$RP_{\text{Total}}$  = revenue to be recovered from all distribution users

$RP_{\text{Over 7,000}}$  = revenue to be recovered from users with demands greater than 7,000 kVA

$RP_{\text{1,000 to 7,000}}$  = revenue to be recovered from users with demands between 1,000 and 7,000 kVA

This equation has unknown elements in each of the terms at this stage. The revenue pools will only be determined when the CMD tariff settings are established and the prices can be applied to the forecast user data for users with demands greater than 1,000 kVA. The price at 7,000 kVA is set by graphically plotting the charge outcomes for each of the users with demands above 7,000 kVA, in the locational zones, and setting a price that puts the charge outcomes between the incremental and stand-alone cost of supply. Graphs demonstrating this are included in section 7.2.

To facilitate the solving of the remaining terms of this equation the pricing settings for users with demands between 1,000 and 7,000 kVA must be determined. The tariffs are defined in terms of 'rate block' structure and, for the demand component of the tariff, take the form:

$$\text{User Demand Charge}_{\text{1,000 to 7,000}} = (\text{Price}_{\text{At 1,000}} * 1,000 \text{ kVA}) + (\text{Price}_{\text{1,000 to 7,000}} * (\text{CMD}_{\text{User}} - 1,000 \text{ kVA}))$$

where:

User Demand Charge  $_{1,000 \text{ to } 7,000}$  = the demand charge for a user with CMD between 1,000 and 7,000 kVA

Price  $_{\text{At } 1,000}$  = the average demand price for all users with CMD below 1,000 kVA

Price  $_{1,000 \text{ to } 7,000}$  = the incremental demand price for this user with CMD between 1,000 and 7,000 kVA

CMD  $_{\text{User}}$  = the contract maximum demand for that user

The Price  $_{1,000 \text{ to } 7,000}$  will be different for each locational zone but can be calculated by the formula:

$$\text{Price}_{1,000 \text{ to } 7,000} = [(\text{Price}_{\text{At } 7,000} * 7,000 \text{ kVA}) - (\text{Price}_{\text{At } 1,000} * 1,000 \text{ kVA})] / 6,000 \text{ kVA}$$

There is now a formula to calculate the price for each user with CMD between 1,000 and 7,000 kVA with the unknown being the price at 1,000 kVA. The price at 7,000 kVA has been previously set.

There is now a single unknown (Price At 1,000) that can be solved in the above equation which now must be expanded as below.

Original Equation:

$$\text{RP}_{\text{Below } 1,000} = \text{RP}_{\text{Total}} - \text{RP}_{\text{Over } 7,000} - \text{RP}_{1,000 \text{ to } 7,000}$$

Expansion of each term:

$$\text{RP}_{\text{Below } 1,000} = \sum \text{User anytime maximum demands multiplied by Price At } 1,000$$

$$\text{RP}_{\text{Total}} = \text{Total HV network revenue entitlement}$$

$$\text{RP}_{\text{Over } 7,000} = \sum \text{Individual demands for users greater than } 7,000 \text{ kVA anytime maximum demands multiplied by the zonal price at the zone substation to which the user is connected}$$

$$\text{RP}_{1,000 \text{ to } 7,000} = \sum \text{User charges for all users with CMDs between } 1,000 \text{ and } 7,000 \text{ kVA}$$

At this stage of the process the average price at and below 1,000 kVA, the demand price formula for each locational zone for demands between 1,000 and 7,000 kVA and the zonal price for demands greater than 7,000 kVA is known. This has set the demand component of the CMD tariffs.

### **Demand-Length Component of the CMD Tariff**

The demand-length component of the tariff is set at zero at 1,000 kVA. It is also uniform at and above 7,000 kVA. The tariff is designed to be expressed in 'rate block' format so that the price is in terms of an incremental price above 1,000 kVA and up to 7,000 kVA and a uniform price above 7,000 kVA.

The price between 1,000 and 7,000 kVA is expressed as:

$$\text{Price}_{1,000 \text{ to } 7,000} = [(\text{Price}_{\text{At } 7,000} * 7,000 \text{ kVA}) - (\text{Price}_{\text{At } 1,000} * 1,000 \text{ kVA})] / 6,000 \text{ kVA}$$

The price settings are established in the same process as setting the demand settings in that the incremental and stand-alone costs are graphically plotted for every CMD user within each locational zone and the price settings are adjusted so the user charges fit between the limits. Graphs demonstrating this are included in section 7.2.

At this stage, the price settings are established for both the demand and demand-length price components of the CMD tariffs. The forecast HV network revenue for the HV and LV CMD users can be calculated by applying the prices to the forecast user data and summing the charges for all users.

The prices for both the demand and demand-length components of the prices are illustrated in Figure 11.

#### **7.1.6 Metering Prices**

The prices for distribution metering are based on the standard metering services for each exit, entry and bi-directional reference service.

#### **7.1.7 Administration costs**

An administration charge is published separately in conjunction with the CMD tariff but is incorporated in the variable component of all the other tariffs.

The setting of the components in the metered demand tariff ensures compatibility with the administration price for the CMD tariff.

#### **7.1.8 RT9 – Streetlighting Tariff**

Separate network Use of System and Asset prices are designed to best recover the costs of providing streetlight services.

The use of system price comprises a fixed and variable charge similar to other low voltage tariffs, based on the expected daily cycle of energy usage.

The asset charge varies with the size and type of luminaire and is based on the annualised cost of capital and maintenance associated with each.

#### **7.1.9 RT10 - Unmetered Supplies**

The unmetered supplies tariff comprises a fixed and variable charge similar to other low voltage tariffs, designed to best recover the costs of providing these services based on the expected daily cycle of energy usage.

#### **7.1.10 RT13 to 16 - Bi-directional Tariffs**

The tariff components for these tariffs are identical to tariffs RT1 to 4, as applicable.

#### **7.1.11 RT17 and RT18**

These are the new tariffs that are designed to better reflect Western Power's system peak than the existing time of use tariffs (RT3, RT4, RT15 and RT16). Short peak and shoulder times and longer off-peak provide customers with more options to adjust their energy consumption in a cost-reflective manner.

#### **7.1.12 RT19 – RT20**

This is a new tariff that is designed to better reflect Western Power's system peak than the existing time of use tariffs (RT3, RT4, RT15, and RT16) and offers a demand charge component. Shorter peak and shoulder times and longer off-peak, combined with the introduction of the demand charge and subsequent cost-reflective energy rates provide customers with price signals to adjust their energy consumption in a cost-reflective manner.

### 7.1.13 RT21 – RT22

In a similar manner to the new tariffs described above, these tariffs are designed to provide customers with price signals to adjust their energy consumption in a cost-reflective manner.

### 7.1.14 Excess Network Usage Charges

The Excess Network Usage Charge (ENUC) is designed in a manner that allows Western Power to recover its forward looking efficient costs in circumstances where a user exceeds its contracted capacity in a manner that accords with the Access Code chapter 7 price requirements and in furtherance of the Access Code objective to:

*‘promote the economically efficient: investment in; and operation of and use of, networks and services of networks in Western Australia in order to promote competition in markets upstream and downstream of the networks.’*

The ENUC which applies to reference services A7, A8, A11, B1 and B2 is specified as two parts. An ENUC that applies to users connected to parts of Western Power’s network that are unconstrained and an ENUC that applies to users connected to parts of Western Power’s network that are constrained. Currently the Eastern Goldfields and Albany regions are constrained as per Western Power’s the State of the Infrastructure Report.

Users who exceed their contracted capacity in unconstrained parts of the network have an ENUC that reflects their usual network tariff. That is because in these unconstrained parts of the network Western Power does not have any reasonable foreseeable additional costs beyond those that it usually incurs in providing network services when a user exceeds its contracted capacity (noting that there may still be damage caused by a user breaching its access contract which may result in loss to Western Power that can be pursued against the user under its access contract).

On the other hand, users who exceed their contracted capacity in constrained parts of the network have additional impacts on Western Power and are likely to incur additional costs for Western Power including:

- additional likelihood of damage to the Western Power network from exceeding network capacity;
- loss of revenue from not being able to provide network access to existing and future network users; and
- requirement to augment (or provide alternatives to augmentation such as a network control service) to facilitate the network capacity used by a user in breach of their access contract as well as other users.

On the basis of these differences the ENUC that applies in constrained parts of the Western Power network is 2.5 times the network tariff.

The following table illustrates why Western Power’s ENUC in constrained areas of the network is (well within) its’ forward-looking costs:

Normal network tariff payable by user for 1MWh <sup>2</sup>	ENUC payable by user for exceeding contracted capacity	The amount payable by Western Power to obtain 1MWh from a	Network rebuild to provide 1MWh <sup>4</sup>
---	--	---	--

<sup>2</sup> Hourly charge based on a 1MW A7/A8 CMD with a flat load connected 10km from a zone sub station

<sup>4</sup> The estimated cost of building a 330kv transmission line to alleviate constraints




	for 1MWh (i.e. 2.5 times network tariff)	network control service <sup>3</sup>	
\$24	\$59	circa. >\$400	\$500

## 7.2 Demonstration of Derivation of Distribution Components of Distribution Reference Tariffs

### 7.2.1 CMD Demand Price Graphs

The following graphs illustrate the proposed prices for the CMD tariffs are between incremental cost and stand-alone cost for the majority of customers. However, no pricing structure can be guaranteed to price between them in every individual case. The prices have been set to achieve a balance between all customers, while still meeting the requirements of section 7.3(b) of the *Code*. Compliance with section 7.3 of the *Code* is demonstrated in section 7.3.

Figure 6: Urban Zone

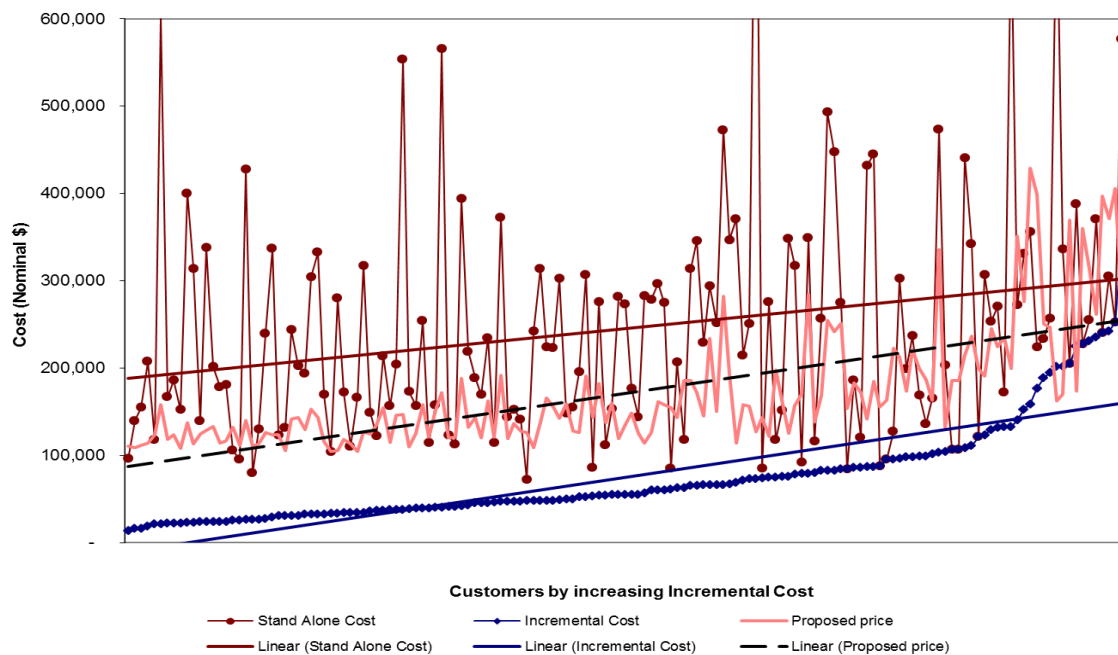

<sup>3</sup> The approximate cost of network control service (approximation based on actual NCS contract)

Figure 7: CBD Zone

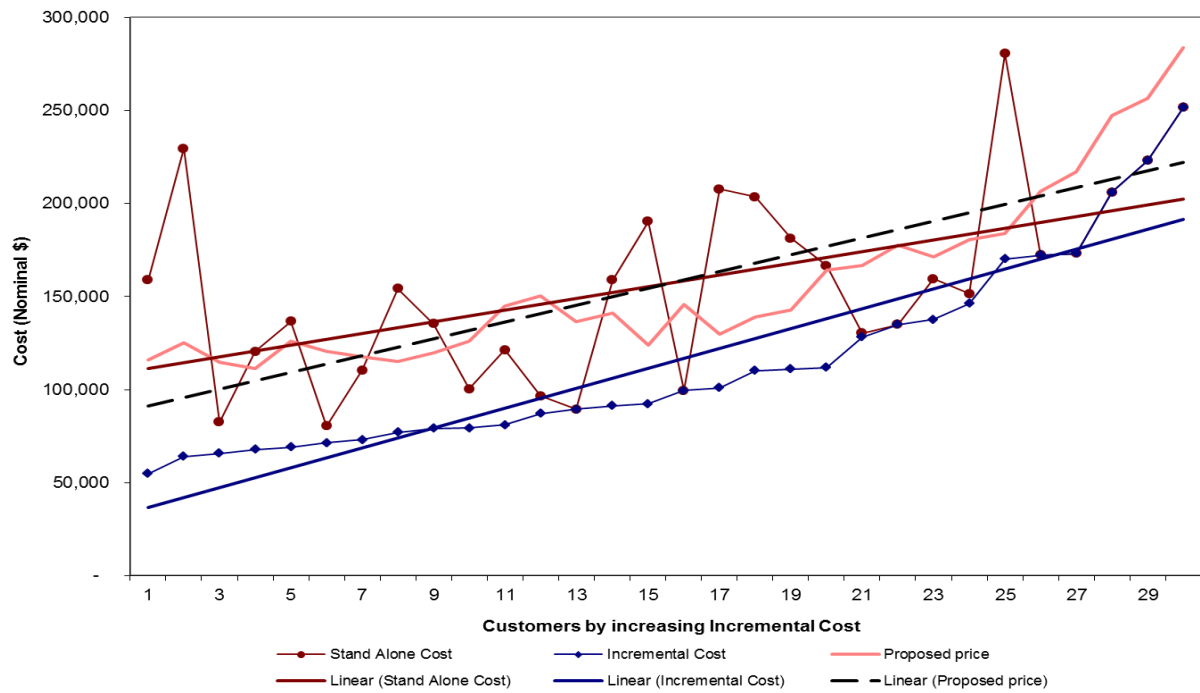


Figure 8: Mining Zone

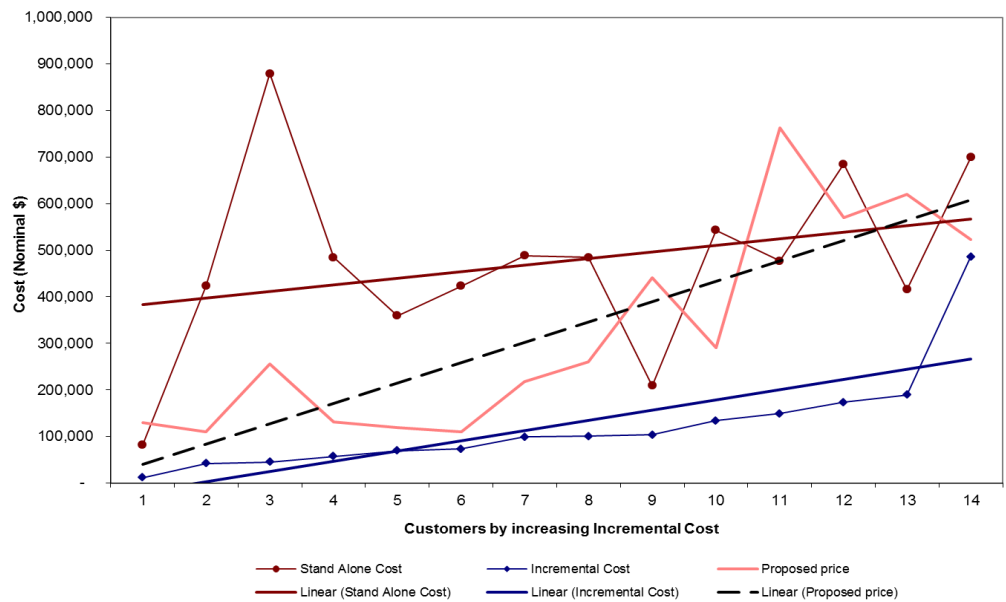


Figure 9: Mixed Zone



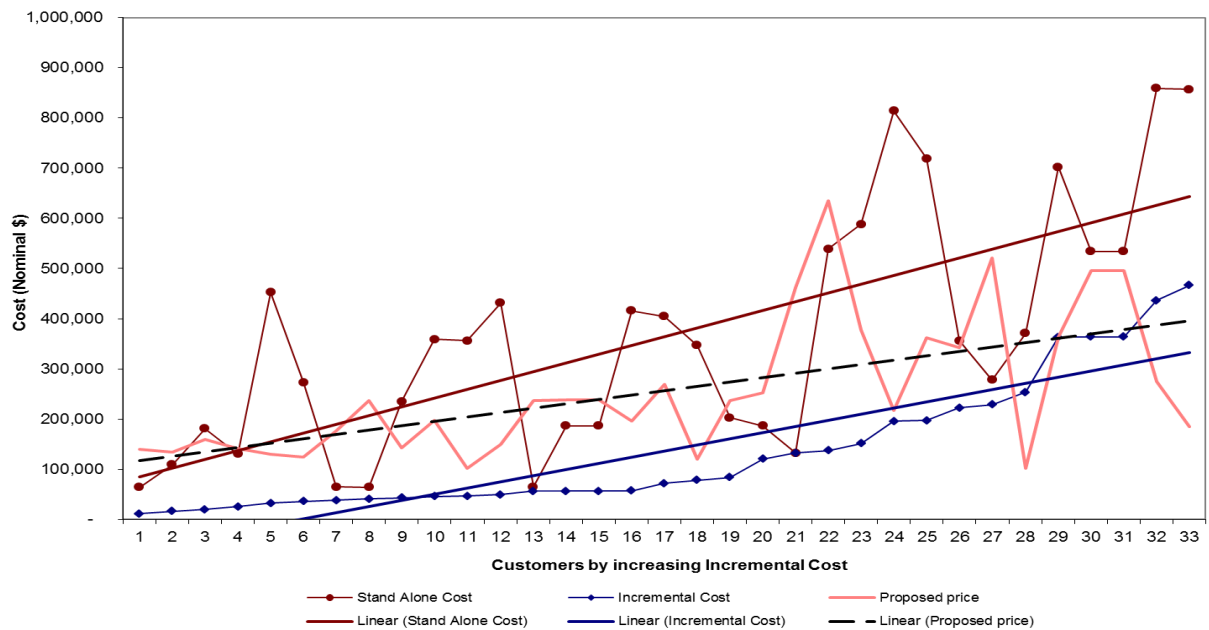


Figure 10: Rural Zone

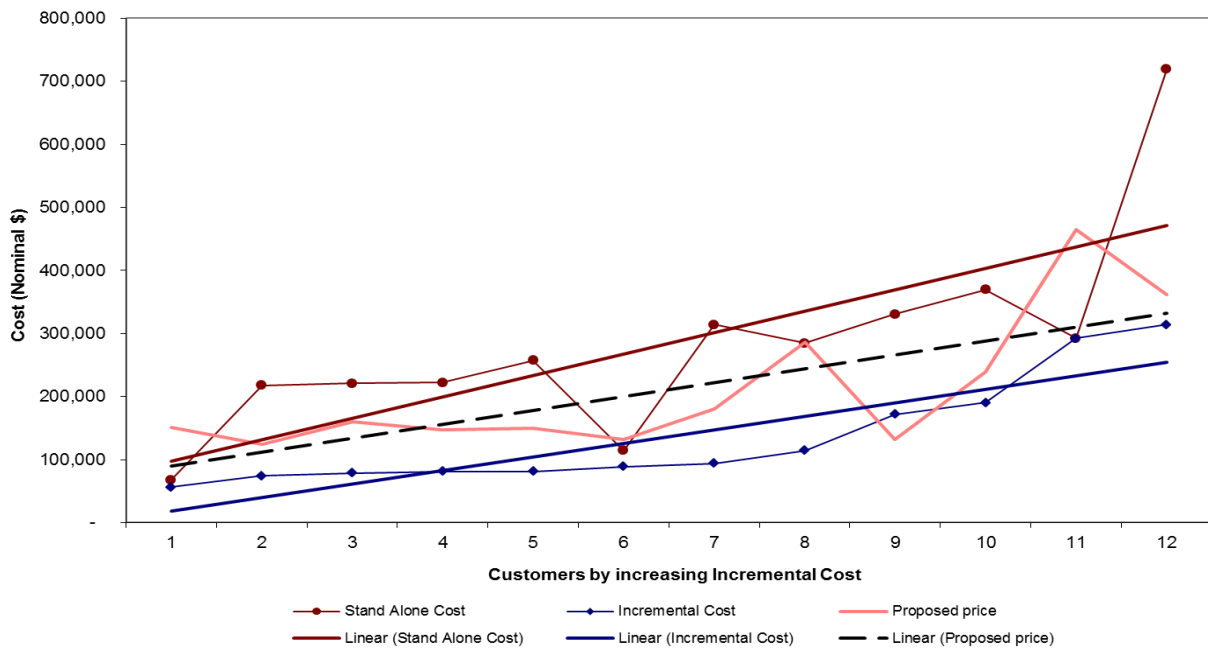

### 7.2.2 Demand/Length Graph

Figure 11: Demand Length Rates and CMD Rates by Zone

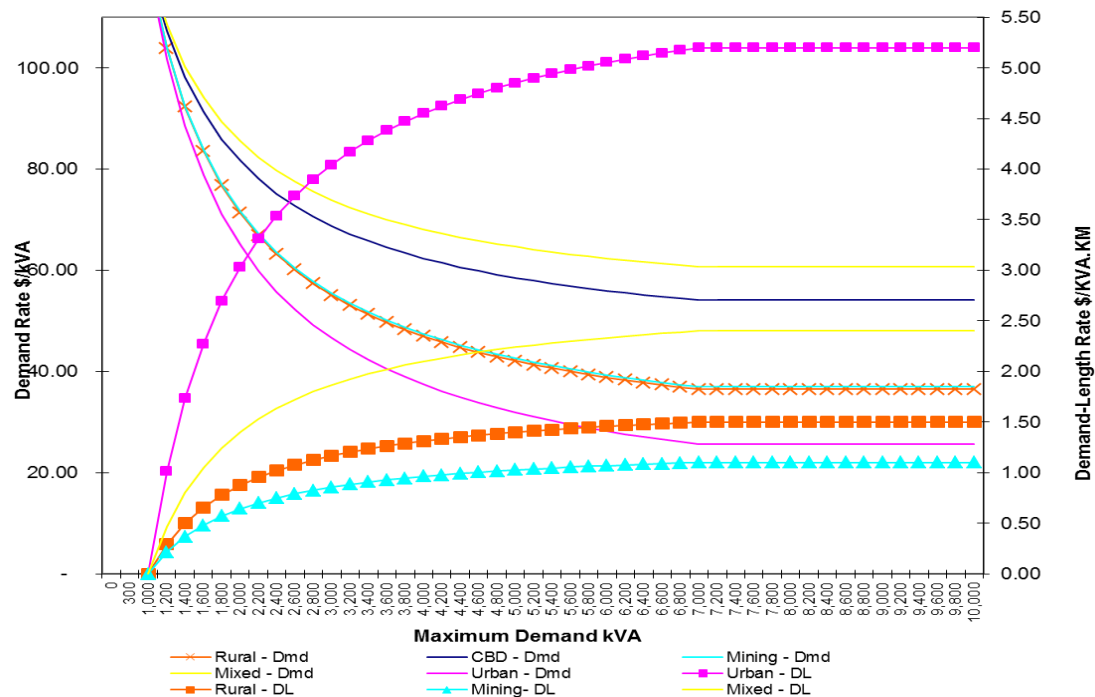

### 7.2.3 Forecast Tariff Revenue

The following table details the forecast distribution reference service revenue, by tariff, which will be collected from distribution connection points.

**Table 7.2: Distribution Reference Service Revenue Recovered from Distribution Connection Points for 2019/20 (\$M Nominal)**

Reference Tariff	kWh	Number Customers	Forecast Distribution Revenue Recovered
RT1 - Anytime Energy (Residential)	4,035,000,000	803,312	536.9
RT2 - Anytime Energy (Business)	930,000,000	72,319	128.5
RT3 - Time of Use Energy (Residential)	53,000,000	7,465	5.7
RT4 - Time of Use Energy (Business)	829,000,000	9,421	73.3
RT5 - High Voltage Metered Demand	758,000,000	296	22.9
RT6 - Low Voltage Metered Demand	2,037,000,000	3,967	117.3
RT7 - High Voltage Contract Maximum Demand	3,109,000,000	291	60.2
RT8 - Low Voltage Contract Maximum Demand	186,000,000	58	12.7
RT9 – Streetlighting	141,000,000	288,415	40.2
RT10 - Unmetered Supplies	40,000,000	16,493	4.8
RT11 - Distribution Entry	-	-	2.2
RT13 – Anytime Energy (Residential) Bi-directional	1,051,000,000	244,678	152.1
RT14 – Anytime Energy (Business) Bi-directional	123,000,000	1,363	11.8
RT15 – Time of Use (Residential) Bi-directional	52,000,000	10,159	6.4
RT16 – Time of Use (Business) Bi-directional	161,000,000	887	13.3
RT17 - Time of Use Energy (Residential)	-	-	-
RT18 - Time of Use Energy (Business)	-	-	-
RT19 – Time of Use Demand (Residential)	-	-	-
RT20 – Time of Use Demand (Business)	-	-	-
RT21 – Multi Part Time of Use Energy (Residential)	-	-	-
RT22 – Multi Part Time of Use Energy (Business)	-	-	-
<b>TOTAL – Reference Services</b>	<b>13,505,000,000</b>	<b>1,459,194</b>	<b>1,188.3</b>
TOTAL – Non-Reference Services			0.7
<b>TOTAL</b>			<b>1,189.0</b>

### 7.3 Demonstration that Distribution Reference Tariffs are between incremental and stand-alone cost of service provision

In accordance with section 7.3(b) of the *Code*, reference tariffs are set to at least recover the incremental cost, but to be less than the stand-alone cost of service provision. The following table demonstrates the outcomes for 2019/20.

**Table 7.3: Demonstration Reference Tariffs are between incremental and stand-alone cost of service provision for 2019/20 (\$M Nominal)**

Reference Service	Reference Tariff	Incremental Cost of Service	Stand-alone Cost of Service Provision	Forecast Revenue Recovered from Reference Tariff
A1	RT1	105.9	659.5	556.9
A2	RT2	22.0	291.7	136.6
A3	RT3	1.5	113.1	6.1
A4	RT4	20.0	272.6	80.6
A5, C5	RT5	3.1	142.8	23.8
A6, C6	RT6	32.9	464.6	120.9
A7, C7	RT7	42.7	214.2	116.8
A8, C8	RT8	3.8	27.3	16.2
A9	RT9	17.1	454.2	41.1
A10	RT10	1.0	422.3	4.9
C1	RT13	27.6	250.0	157.3
C2	RT14	3.0	82.5	12.9
C3	RT15	1.5	112.1	6.8
C4	RT16	3.8	92.7	14.7
A12, C9	RT17	-	-	-
A13, C10	RT18	-	-	-
A14, C11	RT19	-	-	-
A15, C12	RT20	-	-	-
A16, C13	RT21	-	-	-
A17, C14	RT22	-	-	-

### 7.3.1 Method to calculate incremental and stand-alone cost of service provision

Western Power has updated the method used to derive incremental cost in Table 7.3. The definition of incremental cost in the *Code* requires Western Power to consider only that portion of approved total costs that would be avoided if the customer group was not served. As most elements of total costs are fixed and relate to the Regulated Asset Base, these costs have been excluded. In any one year of an *access arrangement*, the only cost savings that would result from not serving a customer group would be the operating costs allocated to that customer group. As such, the method to determine incremental costs considers only operating costs.

Once this adjustment to total costs for incremental costs has been made, the values in Table 7.3 are derived during the cost of supply modelling process. For the stand-alone costs, each service is allocated a combination of fixed and variable cost pools calculated as per this document. Table 7.4 demonstrates the allocations made.

**Table 7.4 – Cost pools used to determine stand-alone cost**

Stand-alone cost
Fixed and variable transmission costs allocated to the service
Metering costs allocated to the service
Variable distribution costs allocated to the service
The relevant fixed distribution costs allocated to the service

## 7.4 Demonstration that incremental costs are recovered through variable components

Section 7.6 of the *Code* states that the incremental cost of service provision should be recovered by the variable components of tariffs. Western Power has had regard to this requirement in setting tariffs. The following table shows that the variable components for 2019/20 tariffs exceeds the incremental cost calculated in section 7.3 for all tariffs.

**Table 7.5: Demonstration that variable costs exceed incremental costs (\$M Nominal)**

Reference Service	Reference Tariff	Incremental Cost of Service	Variable tariff components
A1	RT1	105.9	340.7
A2	RT2	22.0	105.2
A3	RT3	1.5	4.1
A4	RT4	20.0	81.7
A5, C5	RT5	3.1	31.8
A6, C6	RT6	32.9	139.3
A7, C7	RT7	42.7	71.9
A8, C8	RT8	3.8	6.7

Reference Service	Reference Tariff	Incremental Cost of Service	Variable tariff components
A9	RT9	17.1	34.3
A10	RT10	1.0	1.8
C1	RT13	27.6	88.7
C2	RT14	3.0	13.9
C3	RT15	1.5	3.9
C4	RT16	3.8	16.2
A12, C9	RT17		
A13, C10	RT18		
A14, C11	RT19		
A15, C12	RT20		
A16, C13	RT21		
A17, C14	RT22		

## 7.5 Annual Price Review

Distribution prices can be volatile due to matters beyond the control of any one user. In order to minimise this volatility and reduce the commercial uncertainty for users, revenues are subject to an annual 'side constraint' (effectively a limit on annual reference tariff revenue changes) as detailed in the *access arrangement*. This side constraint will, by extension, have a controlling effect on price movements.

## 7.6 TEC in the Distribution Components of Distribution Reference Tariffs

This section details the amounts associated with TEC that are embedded within the distribution reference tariff components.

Western Power pays TEC to the WA State Government to contribute towards maintaining the financial viability of Horizon Power under Part 9A of the *Electricity Industry Act 2004*. The purpose of TEC is to enable the regulated retail tariffs for electricity that is not supplied from the South West Interconnected System (SWIS) to be, so far as is practicable, the same as the regulated retail tariffs for electricity that is supplied from the SWIS.

The graphs and tables detailed in previous sections are inclusive of TEC. The tables that follow in this section separate out the amounts of TEC that are embedded within the distribution reference tariff components.

### 7.6.1 TEC Forecast Revenue

The following table details the forecast TEC, by tariff, which will be collected from distribution connection points.



**Table 7.6 - TEC Recovered from Distribution Connection Points for 2019/20 (\$M Nominal)**

Reference Tariff	kWh	Number Customers	Forecast TEC Recovered
RT1 - Anytime Energy (Residential)	4,035,000,000	803,312	62.3
RT2 - Anytime Energy (Business)	930,000,000	72,319	14.7
RT3 - Time of Use Energy (Residential)	53,000,000	7,465	0.7
RT4 - Time of Use Energy (Business)	829,000,000	9,421	12.4
RT5 - High Voltage Metered Demand	758,000,000	296	8.2
RT6 - Low Voltage Metered Demand	2,037,000,000	3,967	34.4
RT7 - High Voltage Contract Maximum Demand	3,109,000,000	291	5.3
RT8 - Low Voltage Contract Maximum Demand	186,000,000	58	1.6
RT9 – Streetlighting	141,000,000	288,415	0.9
RT10 - Unmetered Supplies	40,000,000	16,493	0.3
RT11 - Distribution Entry	-	-	-
RT13 – Anytime Energy (Residential) Bi-directional	1,051,000,000	244,678	16.2
RT14 – Anytime Energy (Business) Bi-directional	123,000,000	1,363	1.9
RT15 – Time of Use (Residential) Bi-directional	52,000,000	10,159	0.6
RT16 – Time of Use (Business) Bi-directional	161,000,000	887	2.5
RT17 - Time of Use Energy (Residential)	-	-	-
RT18 - Time of Use Energy (Business)	-	-	-
RT19 – Time of Use Demand (Residential)	-	-	-
RT20 – Time of Use Demand (Business)	-	-	-
RT21 – Multi Part Time of Use Energy (Residential)	-	-	-
RT22 – Multi Part Time of Use Energy (Business)	-	-	-
<b>TOTAL</b>	<b>13,505,000,000</b>	<b>1,459,124</b>	<b>162.0</b>

### 7.6.2 TEC Tariff Components – Use of System

The following table details the amounts associated with TEC that are embedded within the distribution reference tariff use of system components.

**Table 7.7: TEC Tariff Components – UOS**

		Fixed TEC	Variable TEC		
		c/day	c/kWh	On-Peak c/kWh	Off-Peak c/kWh
<b>Reference tariff 1 - RT1</b>					
	TEC	-	1.545	-	-
<b>Reference tariff 2 - RT2</b>					
	TEC	-	1.582	-	-
<b>Reference tariff 3 - RT3</b>					
	TEC	-	-	2.254	0.644
<b>Reference tariff 4 - RT4</b>					
	TEC	-	-	2.319	0.663
<b>Reference tariff 9 – RT9</b>					
	TEC	-	0.608	-	-
<b>Reference tariff 10 – RT10</b>					
	TEC	-	0.642	-	-
<b>Reference tariff 13 – RT13</b>					
	TEC	-	1.545	-	-
<b>Reference tariff 14 – RT14</b>					
	TEC	-	1.582	-	-
<b>Reference tariff 15 – RT15</b>					
	TEC	-	-	2.254	0.644
<b>Reference tariff 16 – RT16</b>					
	TEC	-	-	2.319	0.663

**Table 7.8: TEC Tariff Components – RT17 – RT20**

		Fixed TEC	Variable TEC			
		c/day	c/kWh	On-Peak c/kWh	Shoulder c/kWh	Off-Peak c/kWh
<b>Reference tariff 17 - RT17</b>						
	TEC	-	-	1.700	1.545	1.405
<b>Reference tariff 18 - RT18</b>						
	TEC	-	-	1.740	1.582	1.438
<b>Reference tariff 19 - RT19</b>						
	TEC	-	-	1.870	1.545	1.277
<b>Reference tariff 20 - RT20</b>						
	TEC	-	-	1.914	1.582	1.308

**Table 7.9: TEC Tariff Components – RT21 – RT20**

		Fixed TEC	Variable TEC					
		c/day	c/kWh	On-Peak c/kWh	Shoulder c/kWh	Off-Peak c/kWh	Overnight c/kWh	Super Off- Peak c/kWh
<b>Reference tariff 21 - RT21</b>								
	TEC	-	-	1.700	1.545	1.405	1.405	1.264
<b>Reference tariff 22 - RT22</b>								
	TEC	-	-	1.740	1.582	1.438	1.438	1.294

### 7.6.3 TEC Tariff Components – Metered Demand

The following table details the amounts associated with TEC that are embedded within the distribution reference tariff metered demand components.

**Table 7.10: TEC Tariff Components – Metered Demand**

Demand (kVA) (Lower to upper threshold)	RT5 – TEC		RT6 – TEC	
	Fixed c/day	Demand (in excess of lower threshold) c/kVA/day	Fixed c/day	Demand (in excess of lower threshold) c/kVA/day
0 to 300	14.517	17.284	14.517	17.284
300 to 1000	5,199.626	16.673	5,199.626	16.673
1000 to 1500	16,870.944	6.065	16,870.944	6.065

**7.6.4 TEC Tariff Components – Demand Prices**

The following table details the amounts associated with TEC that are embedded within the distribution reference tariff demand components.

**Table 7.11: TEC Tariff Components – Demand Prices**

Pricing Zone	RT 7 and RT 8 – TEC
	Fixed charge (c per day)
CBD	5,000.00
Goldfields Mining	5,000.00
Mixed	5,000.00
Rural	5,000.00
Urban	5,000.00

**7.6.5 TEC Tariff Components – LV prices**

The following table details the amounts associated with TEC that are embedded within the distribution reference tariff RT8.

**Table 7.12: TEC Tariff Components – LV prices**

	Fixed	Demand (c/day)
LV Prices	0.00	1.671/kVA

## **8. Derivation of Other Tariff Components**

The following tariffs are provided on a fee for service basis and the revenue does not count towards the revenue target.

### **8.1 RT25, RT28 and RT29**

Western Power has determined pricing for supply abolishment, remote de-energise and remote re-energise services using a bottom up build methodology, to recover expected input costs such as administration, field labour, materials and fleet costs, as relevant to each service, seeking to achieve the lowest sustainable costs of providing the relevant service.

### **8.2 RT26 and RT27**

For the 19/20 Price List, the tariffs have been set at zero, as input costs are unknown. Further work is needed, in consultation with users, to understand the costs involved in delivering this service. Once this work has been completed, future updates to the Price List will include revised pricing that better reflects the costs involved in providing these services.

## 9. Price Changes

### 9.1 Side Constraint Demonstration

The following table demonstrates compliance with the side constraint as detailed in sections 6.5 of the *access arrangement*. The side constraints are reproduced below.

$$\frac{\sum_{y=1}^n p_t^{xy} q_t^{xy}}{\sum_{y=1}^n p_{t-1}^{xy} q_t^{xy}} \leq (1 + CPI_t)(1 - X_t) + A'_t + 0.02$$

where:

$$A'_t = \frac{(DAA3_t + TAA3_t + \Delta TEC_t + DTEC_t)}{(DR'_t + TR'_t)}$$

The following values have been used to calculate the right-hand side of each side constraint in 2019/20:

**Table 9.1: 2019/20 Side Constraint Components**

Variable	Value	Variable	Value
$CPI_t$	1.89%	$\Delta TEC_t$	-\$36M
$X_t$	-3.57%	$TR'_t$	\$358.2M
$DAA3_t$	0	$DR'_t$	\$1,027.0M
$TAA3_t$	0	$A'_t$	-2.6%

Side constraint values:

**Table 9.2: Side constraint values**

	Constraint
$(1 + CPI_t)(1 - X_t) + A'_t + 0.02$	4.93%

**Table 9.3: Demonstrates compliance with these constraints on all tariffs**

Tariff	Change in weighted average prices	Constraint compliance
RT1	2.2%	✓
RT2	1.8%	✓
RT3	-0.1%	✓
RT4	3.7%	✓
RT5	4.6%	✓
RT6	4.8%	✓
RT7	4.9%	✓
RT8	4.9%	✓
RT9	-2.7%	✓
RT10	2.4%	✓
RT11	2.3%	✓
RT13	2.7%	✓
RT14	-1.3%	✓
RT15	0.5%	✓
RT16	3.4%	✓
RT17	N/A	✓
RT18	N/A	✓
RT19	N/A	✓
RT20	N/A	✓
RT21	N/A	✓
RT22	N/A	✓
TRT1	4.9%	✓
TRT2	4.9%	✓

## 9.2 Individual component changes

The following tables detail the % change in the 2019/20 tariff components when compared to the 2016/17 tariff components (noting that there was no 2017/18 Price List).

### 9.2.1 Use of System Prices

The % changes in the following table are applicable for reference tariffs: RT1, RT2, RT3, RT4, RT9, RT10, RT13, RT14, RT15 and RT16.

**Table 9.4: System Prices RT1, RT2, RT3, RT4, RT9, RT10, RT13, RT14, RT15 and RT16<sup>5</sup>**

		Fixed Price	Energy Rates		
		% Change	Anytime % Change	On-Peak % Change	Off-Peak % Change
<b>Reference tariff 1 - RT1</b>					
	Transmission		35.5%		
	Distribution	5.3%	-0.8%		
	Bundled Tariff	5.3%	6.1%		
<b>Reference tariff 2 – RT2</b>					
	Transmission		37.9%		
	Distribution	8.1%	-1.3%		
	Bundled Tariff	8.1%	5.2%		
<b>Reference tariff 3 - RT3</b>					
	Transmission			35.5%	35.4%
	Distribution	5.3%		-1.1%	-0.6%
	Bundled Tariff	5.3%		6.1%	6.0%
<b>Reference tariff 4 - RT4</b>					
	Transmission			35.5%	35.4%
	Distribution	2.2%		-1.2%	-0.8%
	Bundled Tariff	2.2%		5.6%	6.4%
<b>Reference tariff 9 – RT9</b>					
	Transmission		35.4%		

<sup>5</sup> Note for 2019/20, the approach to metering prices has changed and so the comparison is no longer appropriate. The changes will be reported annually from 2019/20 based on the new approach to pricing. In general, metering prices have reduced significantly in AA4.



		Fixed Price	Energy Rates		
		% Change	Anytime % Change	On-Peak % Change	Off-Peak % Change
	Distribution	3.8%	-1.8%		
	Bundled Tariff	3.8%	6.2%		
<b>Reference tariff 10 – RT10</b>					
	Transmission		35.5%		
	Distribution	1.8%	-1.8%		
	Bundled Tariff	1.8%	3.5%		
<b>Reference tariff 13 – RT13</b>					
	Transmission		35.5%		
	Distribution	5.3%	-0.8%		
	Bundled Tariff	5.3%	6.1%		
<b>Reference tariff 14 – RT14</b>					
	Transmission		37.9%		
	Distribution	8.1%	-1.3%		
	Bundled Tariff	8.1%	5.1%		
<b>Reference tariff 15 – RT15</b>					
	Transmission			35.5%	35.4%
	Distribution	5.3%		-1.1%	-0.6%
	Bundled Tariff	5.3%		6.1%	6.0%
<b>Reference tariff 16 – RT16</b>					
	Transmission			35.5%	35.5%
	Distribution	2.2%		-1.2%	-0.8%
	Bundled Tariff	2.2%		5.6%	6.4%

## 9.2.2 Streetlight Asset Prices

The % changes in the following table are applicable for reference tariff: RT9.

**Table 9.5: Streetlight Asset Prices RT9**

Light Specification	Annual Charge % Change
42W CFL SE	-7.0%
42W CFL BH	-7.0%
42W CFL KN	-7.0%
70W MH	-7.0%
70W HPS	-7.0%
125W MV	-7.0%
150W MH	-7.0%
150W HPS	-7.0%
250W MH	-7.0%
250W HPS	-7.0%
Standard LED 20W	-
Standard LED 36W	-
Standard LED 53W	-
Standard LED 80W	-
Standard LED 160W	-
Standard LED 170W	-
Decorative BH LED 17W	-
Decorative KN LED 17W	-
Decorative LED 34W	-
Decorative LED 42W	-
Decorative LED 80W	-
Decorative LED 100W	-

**Table 9.6: Streetlight Asset Prices RT9**

Light Specification	Annual Charge % Change
50W MV	-4.3%
70W MV	-4.3%
80W MV	-4.3%
150W MV	-4.3%
250W MV	-4.3%
400W MV	-4.3%
40W FLU	-4.3%
80W HPS	-4.3%
125W HPS	-4.3%
100W INC	-4.3%
80W MH	-4.3%
125W MH	-4.3%
22W LED	0.0%

### 9.2.3 Metered Demand Prices

The % changes in the following table are applicable for reference tariff: RT5.

**Table 9.7: Metered Demand Prices RT5**

Demand (kVA) (Lower to upper threshold)	Transmission		Distribution		Bundled Tariff	
	Fixed % Change	Demand (in excess of lower threshold) % Change	Fixed % Change	Demand (in excess of lower threshold) % Change	Fixed % Change	Demand (in excess of lower threshold) % Change
0 to 300		35.5%	-2.1%	1.6%	-2.1%	9.3%
300 to 1000	35.5%	35.5%	-0.4%	2.2%	7.7%	9.9%
1000 to 1500	35.5%	35.5%	0.1%	1.8%	8.3%	11.5%

The % changes in the following table are applicable for reference tariff: RT6.

**Table 9.8: Percent changes for reference tariff RT6**

	Transmission		Distribution		Bundled Tariff	
Demand (kVA) (Lower to upper threshold)	Fixed % Changes	Demand (in excess of lower threshold) % Changes	Fixed % Change	Demand (in excess of lower threshold) % Change	Fixed % Change	Demand (in excess of lower threshold) % Change
0 to 300		32.0%	-2.6%	1.6%	-2.6%	8.3%
300 to 1000	32.0%	32.0%	-0.6%	2.0%	6.3%	8.5%
1000 to 1500	32.0%	32.0%	-0.1%	1.4%	6.8%	8.7%

### 9.2.4 Demand Prices

The % changes in the following table are applicable for reference tariff: RT7 and RT8.

**Table 9.9: Percent changes for reference tariff RT7 and RT8**

Zone Substation	TNI	Pricing Zone	Transmission			Distribution			Bundled		
			Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)
Cook Street	WCKT	CBD	18.5%	11.3%	12.3%	0.0%	-4.0%	-2.7%	5.4%	4.4%	4.6%
Forrest Avenue	WFRT	CBD	18.5%	11.3%	12.3%	0.0%	-4.0%	-2.7%	5.4%	4.4%	4.6%
Hay Street	WHAY	CBD	18.5%	11.3%	12.3%	0.0%	-4.0%	-2.7%	5.4%	4.4%	4.6%
Milligan Street	WMIL	CBD	18.5%	11.3%	12.3%	0.0%	-4.0%	-2.7%	5.4%	4.4%	4.6%
Wellington Street	WWNT	CBD	18.5%	11.3%	12.3%	0.0%	-4.0%	-2.7%	5.4%	4.4%	4.6%
Black Flag	WBKF	Goldfields Mining	18.5%	11.8%	12.3%	0.0%	-5.1%	-2.7%	5.4%	8.7%	8.1%
Boulder	WBLD	Goldfields Mining	18.5%	11.8%	12.3%	0.0%	-5.1%	-2.7%	5.4%	8.5%	7.9%
Bounty	WBNY	Goldfields Mining	18.5%	12.0%	12.3%	0.0%	-5.1%	-2.7%	5.4%	10.1 %	9.5%
West Kalgoorlie	WWKT	Goldfields Mining	18.5%	11.7%	12.3%	0.0%	-5.1%	-2.7%	5.4%	8.1%	7.6%
Albany	WALB	Mixed	18.5%	11.8%	12.3%	0.0%	-3.8%	-2.7%	5.4%	6.5%	6.3%
Boddington	WBOD	Mixed	18.5%	11.2%	12.3%	0.0%	-3.8%	-2.7%	5.4%	3.5%	3.9%
Bunbury Harbour	WBUH	Mixed	18.5%	11.2%	12.3%	0.0%	-3.8%	-2.7%	5.4%	3.4%	3.9%
Busselton	WBSN	Mixed	18.5%	11.6%	12.3%	0.0%	-3.8%	-2.7%	5.4%	5.0%	5.1%
Byford	WBYF	Mixed	18.5%	11.3%	12.3%	0.0%	-3.8%	-2.7%	5.4%	3.8%	4.1%
Capel	WCAP	Mixed	18.5%	11.5%	12.3%	0.0%	-3.8%	-2.7%	5.4%	4.5%	4.7%
Chapman	WCPN	Mixed	18.5%	11.7%	12.3%	0.0%	-3.8%	-2.7%	5.4%	5.7%	5.7%
Darlington	WDTN	Mixed	18.5%	11.4%	12.3%	0.0%	-3.8%	-2.7%	5.4%	4.2%	4.5%
Durlacher Street	WDUR	Mixed	18.5%	11.6%	12.3%	0.0%	-3.8%	-2.7%	5.4%	5.3%	5.3%

Zone Substation	TNI	Pricing Zone	Transmission			Distribution			Bundled		
			Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)
Eneabba	WENB	Mixed	18.5%	11.6%	12.3%	0.0%	-3.8%	-2.7%	5.4%	5.1%	5.1%
Geraldton	WGTN	Mixed	18.5%	11.6%	12.3%	0.0%	-3.8%	-2.7%	5.4%	5.3%	5.3%
Marriott Road	WMRR	Mixed	18.5%	11.2%	12.3%	0.0%	-3.8%	-2.7%	5.4%	3.3%	3.8%
Muchea	WMUC	Mixed	18.5%	11.4%	12.3%	0.0%	-3.8%	-2.7%	5.4%	4.2%	4.4%
Northam	WNOR	Mixed	18.5%	11.6%	12.3%	0.0%	-3.8%	-2.7%	5.4%	5.5%	5.4%
Picton	WPIC	Mixed	18.5%	11.3%	12.3%	0.0%	-3.8%	-2.7%	5.4%	3.8%	4.1%
Rangeway	WRAN	Mixed	18.5%	11.7%	12.3%	0.0%	-3.8%	-2.7%	5.4%	5.6%	5.5%
Sawyers Valley	WSVY	Mixed	18.5%	11.6%	12.3%	0.0%	-3.8%	-2.7%	5.4%	5.1%	5.1%
Yanchep	WYCP	Mixed	18.5%	11.4%	12.3%	0.0%	-3.8%	-2.7%	5.4%	4.2%	4.4%
Yilgarn	WYLN	Mixed	18.5%	11.8%	12.3%	0.0%	-3.8%	-2.7%	5.4%	6.2%	6.1%
Baandee	WBDE	Rural	18.5%	11.8%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.8%	8.2%
Beenup	WBNP	Rural	18.5%	11.8%	12.3%	0.0%	-5.2%	-2.7%	5.4%	9.0%	8.4%
Bridgetown	WBTN	Rural	18.5%	11.6%	12.3%	0.0%	-5.2%	-2.7%	5.4%	7.4%	6.9%
Carrabin	WCAR	Rural	18.5%	11.9%	12.3%	0.0%	-5.2%	-2.7%	5.4%	9.0%	8.4%
Collie	WCOE	Rural	18.5%	11.7%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.0%	7.4%
Coolup	WCLP	Rural	18.5%	11.7%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.4%	7.8%
Cunderdin	WCUN	Rural	18.5%	11.8%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.5%	7.9%
Katanning	WKAT	Rural	18.5%	11.7%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.2%	7.7%
Kellerberrin	WKEL	Rural	18.5%	11.8%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.7%	8.1%
Kojonup	WKOJ	Rural	18.5%	11.5%	12.3%	0.0%	-5.2%	-2.7%	5.4%	6.9%	6.5%
Kondinin	WKDN	Rural	18.5%	11.5%	12.3%	0.0%	-5.2%	-2.7%	5.4%	7.2%	6.8%
Manjimup	WMJP	Rural	18.5%	11.5%	12.3%	0.0%	-5.2%	-2.7%	5.4%	7.3%	6.9%
Margaret River	WMRV	Rural	18.5%	11.7%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.2%	7.7%
Merredin	WMER	Rural	18.5%	11.8%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.4%	7.8%

Zone Substation	TNI	Pricing Zone	Transmission			Distribution			Bundled		
			Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)
Moora	WMOR	Rural	18.5%	11.6%	12.3%	0.0%	-5.2%	-2.7%	5.4%	7.4%	6.9%
Mount Barker	WMBR	Rural	18.5%	11.7%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.4%	7.8%
Narrogin	WNGN	Rural	18.5%	11.8%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.8%	8.1%
Pinjarra	WPNJ	Rural	18.5%	11.2%	12.3%	0.0%	-5.2%	-2.7%	5.4%	6.0%	5.8%
Regans	WRGN	Rural	18.5%	11.6%	12.3%	0.0%	-5.2%	-2.7%	5.4%	7.5%	7.0%
Three Springs	WTSG	Rural	18.5%	11.6%	12.3%	0.0%	-5.2%	-2.7%	5.4%	7.4%	6.9%
Wagerup	WWGP	Rural	18.5%	11.2%	12.3%	0.0%	-5.2%	-2.7%	5.4%	5.8%	5.7%
Wagin	WWAG	Rural	18.5%	11.7%	12.3%	0.0%	-5.2%	-2.7%	5.4%	8.3%	7.7%
Wundowie	WWUN	Rural	18.5%	11.6%	12.3%	0.0%	-5.2%	-2.7%	5.4%	7.8%	7.3%
Yerbillon	WYER	Rural	18.5%	11.8%	12.3%	0.0%	-5.2%	-2.7%	5.4%	9.0%	8.3%
Amherst	WAMT	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Arkana	WARK	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Australian Paper Mills	WAPM	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Balcatta	WBCT	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Beechboro	WBCH	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Belmont	WBEL	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Bentley	WBTY	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Bibra Lake	WBIB	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
British Petroleum	WBPM	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Canning Vale	WCVE	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Clarence Street	WCLN	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Clarkson	WCKN	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Cockburn Cement	WCCT	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%

Zone Substation	TNI	Pricing Zone	Transmission			Distribution			Bundled		
			Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)
Collier	WCOL	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Cottesloe	WCTE	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Edmund Street	WEDD	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Forrestfield	WFFD	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Gosnells	WGNL	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Hadfields	WHFS	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Hazelmere	WHZM	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Henley Brook	WHBK	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Herdsmen Parade	WHEP	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Joel Terrace	WJTE	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Joondalup	WJDP	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Kalamunda	WKDA	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Kambalda	WKBA	Urban	18.5%	11.8%	12.3%	0.0%	-8.4%	-2.7%	5.4%	9.9%	8.9%
Kewdale	WKDL	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Landsdale	WLDE	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Maddington	WMDN	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Malaga	WMLG	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Mandurah	WMHA	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Manning Street	WMAG	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Mason Road	WMSR	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Meadow Springs	WMSS	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Medical Centre	WMCR	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Medina	WMED	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Midland Junction	WMJX	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%



Zone Substation	TNI	Pricing Zone	Transmission			Distribution			Bundled		
			Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)
Morley	WMOY	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Mullaloo	WMUL	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Mundaring Weir	WMWR	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Munday	WMDY	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Murdoch	WMUR	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Myaree	WMYR	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Nedlands	WNED	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
North Beach	WNBH	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
North Fremantle	WNFL	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
North Perth	WNPH	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
O'Connor	WOCN	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Osborne Park	WOPK	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Padbury	WPBY	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Piccadilly	WPCY	Urban	18.5%	11.7%	12.3%	0.0%	-8.4%	-2.7%	5.4%	9.8%	8.8%
Riverton	WRTN	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Rivervale	WRVE	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Rockingham	WROH	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Shenton Park (old)	WSPA	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Shenton Park (new)	WSPK	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Sth Ftle Power Station	WSFT	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Southern River	WSNR	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Tate Street	WTTS	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
University	WUNI	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%

Zone Substation	TNI	Pricing Zone	Transmission			Distribution			Bundled		
			Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)	Fixed charge for first 1000 kVA (c per annum)	Demand charge for 1000<kVA<7000 (c/kVA/annum)	Demand Charge for kVA > 7000 (c/kVA/annum)
Victoria Park	WVPA	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Waikiki	WWAI	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Wangara	WWGA	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Wanneroo	WWNO	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Welshpool	WWEL	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Wembley Downs	WWDN	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Willetton	WWLN	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%
Yokine	WYKE	Urban	18.5%	11.4%	12.3%	0.0%	-8.4%	-2.7%	5.4%	8.3%	7.4%

### 9.2.5 Demand-Length Prices

The % changes in the following table are applicable for reference tariffs: RT5, RT6, RT7, RT8 and RT11 and the CMD/DSOC is between 1,000 and 7,000 kVA.

**Table 9.10: Demand Length Prices RT5, RT6, RT7, RT8 and RT11**

Pricing Zone	For kVA >1000 and first 10 km length % Change	For kVA >1000 and length in excess of 10 km % Change
CBD	N/A	N/A
Urban	2.6%	3.6%
Mining	3.7%	3.7%
Mixed	3.7%	2.4%
Rural	3.3%	2.7%

The % changes in the following table are applicable for reference tariffs: RT7, RT8 and RT11 and the CMD/DSOC is at least 7,000 kVA.

**Table 9.11: Demand-Length Charge RT7, RT8 and RT11**

Pricing Zone	For first 10 km length % Change	For length in excess of 10 km % Change
CBD	N/A	N/A
Urban	2.5%	2.8%
Mining	4.7%	4.3%
Mixed	4.1%	3.3%
Rural	4.6%	2.4%

### 9.2.6 Administration Prices

The % changes in the following table are applicable for reference tariffs: RT7 and RT8.

**Table 9.12: Administration Prices RT7 and RT8**

Peak Demand	% Change
>=7,000 kVA	2.6%
<7,000 kVA	2.8%

### 9.2.7 Low Voltage Prices

The % changes in the following table are applicable for reference tariff: RT8.

**Table 9.13: Low Voltage Prices RT8**

	% Change
Fixed	4.8%
Demand	6.9%

**9.2.8 Connection Prices**

The % changes in the following table are applicable for reference tariff: RT11.

**Table 9.14: Connection Prices RT11**

	% Change
Connection Price	10.0%

**9.2.9 Transmission Use of System Prices**

The % changes in the following table are applicable for reference tariff: TRT1.

**Table 9.15: Transmission Use of System Prices TRT1**

Substation	TNI	% Change
Albany	WALB	5.0%
Alcoa Pinjarra	WAPJ	5.0%
Amherst	WAMT	5.0%
Arkana	WARK	5.0%
Australian Fused Materials	WAFM	5.0%
Australian Paper Mills	WAPM	5.0%
Baandee (WC)	WBDE	5.0%
Balcatta	WBCT	5.0%
Beckenham	WBEC	5.0%
Beechboro	WBCH	5.0%
Beenup	WBNP	5.0%
Belmont	WBEL	5.0%
Bentley	WBTY	5.0%
Bibra Lake	WBIB	5.0%
Binningup Desalination Plant	WBDP	5.0%

Substation	TNI	% Change
Black Flag	WBKF	5.0%
Boddington Gold Mine	WBGM	5.0%
Boddington	WBOD	5.0%
Boulder	WBLD	5.0%
Bounty	WBNY	5.0%
Bridgetown	WBTN	5.0%
British Petroleum	WBPM	5.0%
Broken Hill Kwinana	WBHK	5.0%
Bunbury Harbour	WBUH	5.0%
Busselton	WBSN	5.0%
Byford	WBYF	5.0%
Canning Vale	WCVE	5.0%
Capel	WCAP	5.0%
Carrabin	WCAR	5.0%
Cataby Kerr McGee	WKMC	5.0%
Chapman	WCPN	5.0%
Clarence Street	WCLN	5.0%
Clarkson	WCKN	5.0%
Cockburn Cement	WCCT	5.0%
Cockburn Cement Ltd	WCCL	5.0%
Collie	WCOE	5.0%
Collier	WCOL	5.0%
Cook Street	WCKT	5.0%
Coolup	WCLP	5.0%
Cottesloe	WCTE	5.0%
Cunderdin	WCUN	5.0%
Darlington	WDTN	5.0%
Edgewater	WEDG	5.0%

Substation	TNI	% Change
Edmund Street	WEDD	5.0%
Eneabba	WENB	5.0%
Forrest Ave	WFRT	5.0%
Forrestfield	WFFD	5.0%
Geraldton	WGTN	5.0%
Glen Iris	WGNI	5.0%
Golden Grove	WGGV	5.0%
Gosnells	WGNL	5.0%
Hadfields	WHFS	5.0%
Hay Street	WHAY	5.0%
Hazelmere	WHZM	5.0%
Henley Brook	WHBK	5.0%
Herdsmen Parade	WHEP	5.0%
Joel Terrace	WJTE	5.0%
Joondalup	WJDP	5.0%
Kalamunda	WKDA	5.0%
Katanning	WKAT	5.0%
Kellerberrin	WKEL	5.0%
Kewdale	WKDL	5.0%
Kojonup	WKOJ	5.0%
Kondinin	WKDN	5.0%
Kwinana Alcoa	WAKW	5.0%
Kwinana Desalination Plant	WKDP	5.0%
Kwinana PWS	WKPS	5.0%
Landsdale	WLDE	5.0%
Maddington	WMDN	5.0%
Malaga	WMLG	5.0%
Mandurah	WMHA	5.0%

Substation	TNI	% Change
Manjimup	WMJP	5.0%
Manning Street	WMAG	5.0%
Margaret River	WMRV	5.0%
Marriott Road Barrack Silicon Smelter	WBSI	5.0%
Marriott Road	WMRR	5.0%
Mason Road	WMSR	5.0%
Mason Road CSBP	WCBP	5.0%
Mason Road Kerr McGee	WKMK	5.0%
Meadow Springs	WMSS	5.0%
Medical Centre	WMCR	5.0%
Medina	WMED	5.0%
Merredin 66kV	WMER	5.0%
Midland Junction	WMJX	5.0%
Milligan Street	WMIL	5.0%
Moora	WMOR	5.0%
Morley	WMOY	5.0%
Mt Barker	WMBR	5.0%
Muchea Kerr McGee	WKMM	5.0%
Muchea	WMUC	5.0%
Muja PWS	WMPS	5.0%
Mullaloo	WMUL	5.0%
Munday	WMDY	5.0%
Murdoch	WMUR	5.0%
Mundaring Weir	WMWR	5.0%
Myaree	WMYR	5.0%
Narrogin	WNGN	5.0%
Nedlands	WNED	5.0%
North Beach	WNBH	5.0%

Substation	TNI	% Change
North Fremantle	WNFL	5.0%
North Perth	WNPH	5.0%
Northam	WNOR	5.0%
Nowgerup	WNOW	5.0%
O'Connor	WOCN	5.0%
Osborne Park	WOPK	5.0%
Padbury	WPBY	5.0%
Parkeston	WPRK	5.0%
Parklands	WPLD	5.0%
Piccadilly	WPCY	5.0%
Picton 66kv	WPIC	5.0%
Pinjarra	WPNJ	5.0%
Rangeway	WRAN	5.0%
Regans	WRGN	5.0%
Riverton	WRTN	5.0%
Rivervale	WRVE	5.0%
Rockingham	WROH	5.0%
Sawyers Valley	WSVY	5.0%
Shenton Park	WSPA	5.0%
Southern River	WSNR	5.0%
South Fremantle	WSFT	5.0%
Summer St	WSUM	5.0%
Sutherland	WSRD	5.0%
Tate Street	WTTS	5.0%
Three Springs	WTSG	5.0%
Three Springs Terminal	WTST	5.0%
Tomlinson Street	WTLN	5.0%
University	WUNI	5.0%



Substation	TNI	% Change
Victoria Park	WVPA	5.0%
Wagerup	WWGP	5.0%
Wagin	WWAG	5.0%
Waikiki	WWAI	5.0%
Wangara	WWGA	5.0%
Wanneroo	WWNO	5.0%
Wellington Street	WWNT	5.0%
Welshpool	WWEL	5.0%
Wembley Downs	WWDN	5.0%
West Kalgoorlie	WWKT	5.0%
Western Collieries	WWCL	5.0%
Western Mining	WWMG	5.0%
Westralian Sands	WWSD	5.0%
Willetton	WWLN	5.0%
Worsley	WWOR	5.0%
Wundowie	WWUN	5.0%
Yanchep	WYCP	5.0%
Yerbillon	WYER	5.0%
Yilgarn	WYLN	5.0%
Yokine	WYKE	5.0%

The % changes in the following table are applicable for reference tariffs: RT11 and TRT2.

**Table 9.16 Transmission Use of System Prices RT11 and TRT2**

Substation	TNI	% Change
Albany	WALB	4.9%
Badgingarra	BGA	N/A
Boulder	WBLD	4.8%
Bluewaters	WBWP	4.8%
Cockburn PWS	WCKB	4.8%
Collgar	WCGW	4.8%
Collie PWS	WCPS	4.8%
Emu Downs	WEMD	4.8%
Geraldton	WGTN	4.8%
Greenough Solar Farm	TMGS	4.7%
Kemerton PWS	WKEM	4.8%
Kwinana Alcoa	WAKW	4.8%
Kwinana Donaldson Road	WKND	4.8%
Kwinana PWS	WKPS	4.8%
Landwehr (Alinta)	WLWT	4.8%
Mason Road	WMSR	4.8%
Merredin Power Station	TMDP	4.8%
Muja PWS	WMPS	4.8%
Mumbida Wind Farm	TMBW	4.8%
Mungarra GTs	WMGA	4.8%
Newgen Kwinana	WNGK	4.8%
Newgen Neerabup	WGNN	4.8%
Oakley (Alinta)	WOLY	4.8%
Parkeston	WPKS	4.8%
Pinjar GTs	WPJR	4.8%
Alcoa Pinjarra	WAPJ	4.8%

Substation	TNI	% Change
Tiwest GT	WKMK	4.8%
Wagerup	WWGP	4.8%
Walkaway Windfarm	WWWF	4.8%
West Kalgoorlie GTs	WWKT	4.8%
Worsley	WWOR	4.8%

#### 9.2.10 Common Service Prices

The % changes in the following table are applicable for reference tariff: TRT1.

**Table 9.17: Common Service Prices TRT1**

	% Change
Common Service Price	7.2%

#### 9.2.11 Control System Service Prices

The % changes in the following table are applicable for reference tariff: RT11 and TRT2.

**Table 9.18: Control System Service Prices RT11 and TRT2**

	% Change
Control System Service Price (Generators)	4.8%

The % changes in the following table are applicable for reference tariff: TRT1.

**Table 9.19: Control System Service Prices TRT1**

	% Change
Control System Service Price (Loads)	6.7%

#### 9.2.12 Metering Prices

The % changes in the following table are applicable for reference tariffs: TRT1 and TRT2.

**Table 9.20: Metering Prices TRT1 and TRT2**

	% Change
Transmission Metering	-76.1%

# Appendix A

## A.1 Price Setting for New Transmission Nodes Policy

This policy applies when a new transmission node is established.

Transmission “use of system” prices for both entry and exit points are derived using the analysis tool T-Price, based on historical load flow information. In the case of new sites, historical data is not available.

However, there is a need for both Western Power and the prospective user to have a fairly accurate TUOS price and connection price. Western Power requires the prices to determine future revenues from the connection, and any associated capital contribution. The user requires the price and capital contribution for the purposes of project feasibility, and their internal approval processes.

This policy addresses this issue by providing a degree of price certainty over the medium term.

### Policy Statement – Transmission Use of System Price (TUOS)

This policy will apply to new connection points on the transmission and distribution system where the prospect is that it will be a single connection point.

1. Western Power will nominate a TUOS price consistent with all the principles described in this document based on the best available knowledge of the network parameters including asset values and expected load flows. This would also include necessary assumptions for maximum demand and utilisation at the new connection and also any other new or forecast connections.
2. That nominated nodal TUOS price will then be adjusted annually in line with the CMD weighted average TUOS price adjustment for all other load or generator transmission nodes (as applicable).
3. Once that connection point is established the nominated TUOS price (adjusted in accordance with step 2) will apply at the commencement of the access contract, with annual price adjustments at the start of each financial year of no greater than (plus or minus) the annual pricing side constraint as detailed in the *access arrangement*. (Thus, the nominated TUOS price will converge over time with and future price based on future T-Price runs.)
4. The TUOS price will be published once the connection point is commissioned.
5. Where another user subsequently connects to such a connection point the price that will apply will be the price applying to that connection point at the time.
6. The common service, metering and control system prices that apply in this circumstance will be the standard published prices.

### Policy Statement – Transmission Connection Price

The transmission connection price, for new connections where there was no previous connection point, is determined in accordance with the principles described below. There are two categories in which the new connection point can fit.

#### A connection that is unlikely to be shared by other users.

In this case the connection asset would be dedicated to the single user. The asset can be constructed either by the user or by Western Power, and the user has the option to own the asset or to allow Western Power to own the asset.

Where Western Power will own the asset the capital contribution for the connection asset will be as determined by the Contributions Policy.

The annual connection price is calculated to recover to expected operations and maintenance costs for the connection asset and is currently set at 1.88% of the full capital cost. This percentage is based on the average of the ratio of the forecast Operations and Maintenance cost and the GODV of the transmission network over the *access arrangement* period. Once the annual connection price has been determined for a particular connection point, the price is adjusted annually by the all capitals consumer price index (**CPI**).

**A connection point where there is a high likelihood that other users will connect in the future.**

In this circumstance the user still retains the option of owning the connection asset. If the user prefers this option Western Power may require the ability to build connection assets for other users on the same site. Where the user does select this option the calculation of the capital contribution and the associated connection access price is on the same basis as the first option.

Where the user would prefer Western Power to own the connection asset, the connection access price would be the published price that applies to all multi-user substations within the Western Power Network. This published price would be used by Western Power to calculate the capital contribution for the connection asset.

Western Power will offer this option at its discretion depending on the likelihood of future users connecting to the connection point.